





better. easier. faster.

For over 80 years, GEBO has been dedicated to a clear vision: to improve, simplify and speed up the work of installers through smart solutions.

Our aim is to offer high-quality and long-lasting systems that enable efficient and effective work.

We set standards in the development, production and sale of systems for pipe connections and repairs, specializing in steel, polyethylene, copper and multilayer composite pipes. Our products are used every day throughout Europe in the public, private and industrial sectors.

Our solutions are designed to provide installers with the best tools, which is why GEBO stands for quality and reliability.

www.gebo.com

geboflex multi pipe reducer



MULTI PIPE REDUCER

Internal adapter for connecting and reducing two piping systems of different external or internal diameters, materials, or surface structures; connection always fits an external pipe diameter or into an internal pipe diameter (reduction); multiple combination possibilities per adapter; suitable for horizontal or vertical installation; compatible with other adapters; suitable for use in plaster, concrete, and soil; UV and weather-resistant material; noise-reducing.

FEATURES AND BENEFITS



- Suitable for all waste water pipes
- For horizontal & vertical installation
- Minimal reduction path
- UV-resistant, suitable for underground and flush-mounted installation
- Disposal and supply of service water
- Maximum stability thanks to pressure pressing
- Quick & easy installation without tools
- Suitable for supply/exhaust air connections

SPECIFICATION

Pressure density	0.5 bar / 7.3 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Product standards	EN 681-2

RESISTANCES

Heat resistant	140 °C
Cold resistant	-60 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓



Article no.	A Size range	B Size range	L Length	Weight
C10011	50 mm	40 / 32 mm	62 mm	0.04 kg
C10012	64 / 58 mm	50 / 40 mm	95 mm	0.06 kg
C10013	75 / 70 mm	50 / 40 mm	95 mm	0.11 kg
C10016	96 / 83 mm	75 / 50 mm	98 mm	0.19 kg
C10017	100-105 mm	75 / 50 mm	64 mm	0.18 kg
C10014	100-105 mm	90 / 75 mm	65 mm	0.13 kg
C10015	123-130 mm	110 / 75 mm	68 mm	0.24 kg
C10107	150 / 125 mm	110 mm	115 mm	0.42 kg


PLUG ADAPTOR



Internal adapter for connecting two piping systems with the same pipe dimensions (DN) as well as for the same or different materials and surface structures; noise-reducing sealing lips; recommended for vertical installation for black water; suitable for horizontal or vertical installation for grey water; suitable for use in plaster, concrete, and soil; UV and weather-resistant material.

FEATURES AND BENEFITS

- Suitable for all waste water pipes
- Flow-optimized internal reinforcement
- Reliable connection for floor-level pipes
- UV-resistant, suitable for underground and flush-mounted installation
- Disposal and supply of service water
- Maximum stability due to pressure grouting
- Flexible against earth settlement
- Suitable for supply/exhaust air connections

geboflex plug adapter





SPECIFICATION

Pressure density	0.5 bar / 7.3 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Socket wrench insert	SW 8 mm
Tightening torque	6,0 Nm
Angular deviation (max.)	5,0°
Product standards	EN 681-2

RESISTANCES

Heat resistant	140 °C
Cold resistant	-60 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

Article no.	A Size range	B Size range	L Length	E Plug depth	Weight
C11017	73-85 mm	69-75 mm	100 mm	37 mm	0.19 kg
C11022	73-90 mm	79-86 mm	115 mm	45 mm	0.25 kg
C11020	100-116 mm	100-105 mm	115 mm	45 mm	0.31 kg
C11021	120-141 mm	117-127 mm	125 mm	50 mm	0.45 kg
C11023	150-168 mm	145-157 mm	145 mm	60 mm	0.84 kg



geboflex pipe reducer

PIPE REDUCER

Internal adapter for connecting and reducing two pipe systems with different external or internal diameters, materials or surface structures; connection is always made to an external pipe diameter or into an internal pipe diameter (reduction); noise-reducing; suitable for horizontal or vertical installation; suitable for flush-mounted, concrete and soil applications; UV and weather-resistant material

FEATURES AND BENEFITS


- Suitable for all waste water pipes
- For horizontal & vertical installation
- Minimal reduction path
- UV-resistant, suitable for underground and flush-mounted installation
- Disposal and supply of service water
- Maximum stability thanks to pressure pressing
- Quick & easy installation without tools
- Suitable for supply/exhaust air connections


SPECIFICATION

Pressure density	0.5 bar / 7.3 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Product standards	EN 681-1

RESISTANCES

Heat resistant	140 °C
Cold resistant	-60 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓





Article no.	A Size range	B Size range	L Length	Weight
C10141	36 mm	32 mm	32 mm	0.01 kg
C10001	43 mm	32 mm	22 mm	0.02 kg
C10002	43 mm	40 mm	22 mm	0.01 kg
C10003	45 mm	32 mm	22 mm	0.02 kg
C10004	45 mm	40 mm	22 mm	0.01 kg
C10089	50 mm	32 mm	22 mm	0.04 kg
C10090	50 mm	40 mm	32 mm	0.03 kg
C10093	70 mm	32 mm	26 mm	0.07 kg
C10094	70 mm	50 mm	33 mm	0.07 kg
C10005	73 mm	50 mm	33 mm	0.07 kg
C10095	83 mm	40 mm	37 mm	0.15 kg
C10096	83 mm	50 mm	37 mm	0.13 kg
C10097	83 mm	75 mm	38 mm	0.07 kg
C10098	96 mm	50 mm	32 mm	0.17 kg
C10099	96 mm	75 mm	32 mm	0.11 kg
C10106	100 mm	50 mm	32 mm	0.18 kg
C10084	100 mm	75 mm	32 mm	0.14 kg
C10085	105 mm	90 mm	32 mm	0.07 kg
C10086	105 mm	75 mm	32 mm	0.14 kg
C10088	123 mm	75 mm	32 mm	0.23 kg
C10087	123 mm	110 mm	38 mm	0.12 kg
C10006	150 mm	110 mm	36 mm	0.25 kg
C10007	178 mm	160 mm	36 mm	0.20 kg

WALL SEAL

Seal for connecting pipes with spigot ends to main pipes or shafts made of different materials or surface structures; starting from a wall thickness of 40 mm; suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material..

FEATURES AND BENEFITS

- Suitable for all waste water pipes
- For connection to concrete pipes and manholes
- For horizontal & vertical installation
- Connections with an angle of up to 5° possible
- UV-resistant, suitable for underground and flush-mounted installation
- Disposal and supply of service water
- Connections in the condensate drainage area
- Suitable for supply/exhaust air connections
- Flexible with regard to ground settlement



SPECIFICATION


Pressure density	0.6 bar / 8.7 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Product standards	EN 681-1

RESISTANCES

Heat resistant	140 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

geboflex wall seal





Article no.	A Size range	B Clamping range	L Length	Weight
C18251	75 mm	50 mm	66 mm	0.18 kg
C18206	138 mm	110 mm	66 mm	0.40 kg
C18207	151 mm	125 mm	66 mm	0.50 kg
C18208	186 mm	160 mm	66 mm	0.50 kg
C18209	226 mm	200 mm	66 mm	0.60 kg
C18211	276 mm	250 mm	66 mm	0.87 kg
C18212	341 mm	315 mm	66 mm	1.20 kg
C18213	426 mm	400 mm	66 mm	1.99 kg
C18214	526 mm	500 mm	66 mm	2.09 kg
C18210	658 mm	630 mm	66 mm	2.20 kg

geboflex adapter couplings



ADAPTOR COUPLING CAC

External adapter for connecting two piping systems with different external diameters as well as different materials or surface structures; for reducing various pipe dimensions; suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material.

FEATURES AND BENEFITS

- Suitable for all waste water pipes
- Durable and maintenance-free connection
- For horizontal and vertical installation
- Suitable for ribbed and insulated pipes
- UV-resistant, suitable for underground and flush-mounted installation
- Disposal and supply of service water
- Connections in the condensate drain area
- Suitable for supply/exhaust air connections

SPECIFICATION


Pressure density	0.6 bar / 8.7 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Socket wrench insert	SW 8 mm
Product standards	EN 681-1, EN 16397, EN 295-4

RESISTANCES


Heat resistant	120 °C
Cold resistant	-60 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓



geboflex adapter couplings



Article no.	A Size range	B Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)
C12027	30-34 mm	24-28 mm	70 mm	0.1 kg	5,0°	20 mm
C12043	32-40 mm	24-32 mm	70 mm	0.10 kg	5,0°	20 mm
C12028	38-43 mm	30-35 mm	70 mm	0.12 kg	5,0°	20 mm
C12044	40-50 mm	24-32 mm	70 mm	0.12 kg	5,0°	20 mm
C12023	40-50 mm	32-40 mm	70 mm	0.12 kg	5,0°	20 mm
C12029	48-56 mm	38-43 mm	70 mm	0.14 kg	5,0°	20 mm
C12024	53-64 mm	40-50 mm	93 mm	0.18 kg	5,0°	20 mm
C12047	50-65 mm	35-42 mm	70 mm	0.17 kg	5,0°	25 mm
C12030	60-68 mm	38-43 mm	70 mm	0.16 kg	5,0°	20 mm
C12025	70-75 mm	58-64 mm	70 mm	0.22 kg	5,0°	20 mm
C12026	75-90 mm	40-50 mm	70 mm	0.23 kg	5,0°	20 mm
C12049	75-90 mm	53-64 mm	90 mm	0.23 kg	5,0°	25 mm
C12031	82-92 mm	48-56 mm	80 mm	0.23 kg	5,0°	22 mm
C12032	82-92 mm	60-68 mm	80 mm	0.24 kg	5,0°	22 mm
C12034	100-115 mm	40-50 mm	100 mm	0.25 kg	5,0°	25 mm
C12037	100-115 mm	50-64 mm	100 mm	0.3 kg	5,0°	25 mm
C12052	100-116 mm	75-90 mm	95 mm	0.31 kg	5,0°	25 mm
C12039	105-120 mm	35-42 mm	100 mm	0.36 kg	5,0°	25 mm
C12041	110-122 mm	60-68 mm	120 mm	0.39 kg	5,0°	35 mm
C12042	110-122 mm	80-95 mm	100 mm	0.46 kg	5,0°	35 mm
C12040	110-122 mm	48-56 mm	120 mm	0.39 kg	5,0°	25 mm
C12054	110-125 mm	100-116 mm	105 mm	0.45 kg	5,0°	30 mm
C12056	121-136 mm	80-95 mm	105 mm	0.55 kg	5,0°	30 mm
C12057	121-136 mm	100-116 mm	105 mm	0.44 kg	5,0°	35 mm
C12033	121-136 mm	110-121 mm	100 mm	0.47 kg	5,0°	35 mm
C12060	130-145 mm	110-125 mm	120 mm	0.63 kg	5,0°	35 mm
C12062	144-160 mm	110-122 mm	120 mm	0.67 kg	5,0°	35 mm
C12063	144-160 mm	121-136 mm	120 mm	0.75 kg	5,0°	35 mm
C12065	155-170 mm	110-125 mm	120 mm	0.74 kg	5,0°	35 mm
C17411	155-170 mm	130-145 mm	120 mm	0.74 kg	5,0°	35 mm
C12036	170-191 mm	160-170 mm	100 mm	0.69 kg	5,0°	35 mm
C17415	170-192 mm	110-122 mm	120 mm	0.88 kg	5,0°	35 mm
C17416	170-192 mm	121-136 mm	120 mm	0.93 kg	5,0°	35 mm




Article no.	A Size range	B Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)
C17417	170-192 mm	144-160 mm	120 mm	0.93 kg	5,0°	35 mm
C17420	180-200 mm	130-145 mm	150 mm	1.20 kg	5,0°	45 mm
C17421	180-200 mm	155-170 mm	150 mm	1.13 kg	5,0°	45 mm
C17034	180-200 mm	160-180 mm	150 mm	1.80 kg	5,0°	45 mm
C17418	185-210 mm	100-115 mm	150 mm	1.12 kg	5,0°	45 mm
C17423	185-210 mm	110-125 mm	150 mm	1.20 kg	5,0°	45 mm
C17424	185-210 mm	144-160 mm	150 mm	1.20 kg	5,0°	45 mm
C17422	185-210 mm	160-180 mm	150 mm	1.22 kg	5,0°	45 mm
C17426	195-215 mm	100-115 mm	150 mm	1.35 kg	5,0°	45 mm
C17182	190-215 mm	150-165 mm	150 mm	1.15 kg	5,0°	45 mm
C17037	260-285 mm	240-250 mm	130 mm	1.52 kg	3,0°	45 mm
C17183	200-225 mm	160-175 mm	150 mm	1.21 kg	5,0°	45 mm
C17192	195-220 mm	155-170 mm	150 mm	1.40 kg	5,0°	45 mm
C17184	210-235 mm	110-122 mm	150 mm	1.33 kg	5,0°	45 mm
C17185	210-235 mm	121-136 mm	150 mm	1.32 kg	5,0°	45 mm
C17186	210-235 mm	144-160 mm	150 mm	1.33 kg	5,0°	45 mm
C17187	210-235 mm	170-192 mm	150 mm	1.37 kg	5,0°	45 mm
C17188	210-235 mm	190-215 mm	150 mm	1.34 kg	5,0°	45 mm
C17189	240-265 mm	144-160 mm	150 mm	1.60 kg	3,0°	45 mm
C17190	240-265 mm	170-192 mm	150 mm	1.64 kg	3,0°	45 mm
C17191	240-265 mm	190-215 mm	150 mm	1.71 kg	3,0°	45 mm
C17193	240-265 mm	210-235 mm	150 mm	1.67 kg	3,0°	45 mm

Article no.	A Size range	B Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)
C17194	250-275 mm	160-175 mm	150 mm	1.75 kg	3,0°	45 mm
C17195	250-275 mm	200-225 mm	150 mm	1.77 kg	3,0°	45 mm
C12035	260-285 mm	180-205 mm	150 mm	2.25 kg	3,0°	45 mm
C17196	265-290 mm	144-160 mm	150 mm	1.92 kg	3,0°	45 mm
C17197	265-290 mm	210-235 mm	150 mm	1.92 kg	3,0°	45 mm
C17198	265-290 mm	235-260 mm	150 mm	1.89 kg	3,0°	45 mm
C17199	270-295 mm	185-210 mm	150 mm	2.50 kg	3,0°	45 mm
C17200	295-320 mm	144-160 mm	150 mm	2.53 kg	3,0°	45 mm
C17201	295-320 mm	170-192 mm	150 mm	3.00 kg	3,0°	45 mm
C17206	295-320 mm	210-235 mm	150 mm	2.34 kg	3,0°	45 mm
C17207	295-320 mm	240-265 mm	150 mm	2.50 kg	3,0°	45 mm
C17208	295-320 mm	265-290 mm	150 mm	2.50 kg	3,0°	45 mm
C17209	310-335 mm	180-205 mm	150 mm	3.25 kg	3,0°	45 mm
C17212	335-360 mm	295-320 mm	165 mm	2.90 kg	3,0°	50 mm
C17210	335-360 mm	240-265 mm	165 mm	2.88 kg	3,0°	50 mm
C17211	335-360 mm	265-290 mm	165 mm	3.50 kg	3,0°	50 mm
C17215	360-385 mm	300-325 mm	165 mm	3.00 kg	3,0°	50 mm
C17213	360-385 mm	240-265 mm	165 mm	3.50 kg	3,0°	50 mm
C17214	360-385 mm	265-290 mm	165 mm	3.50 kg	3,0°	50 mm
C17038	360-385 mm	325-335 mm	160 mm	3.00 kg	3,0°	50 mm
C17228	395-420 mm	240-265 mm	165 mm	4.00 kg	3,0°	50 mm
C17242	395-420 mm	265-290 mm	165 mm	4.00 kg	3,0°	50 mm



geboflex standard coupling XL



STANDARD COUPLING XL

External adapter for connecting two piping systems with the same pipe dimensions (DN), as well as for the same or different materials and surface structures; suitable for high shear force loads; wider support area with 300mm; differences in external diameter of more than 10 mm should be compensated with Csaus compensating rings; noise-reducing sealing lips; suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material.

FEATURES AND BENEFITS

- Suitable for all waste water pipes
- For horizontal and vertical installation
- Optimal for increased shear loads
- UV-resistant, suitable for underground and flush-mounted installation
- Disposal and supply of service water
- Suitable for supply/exhaust air connections over 300 mm in height/length
- Suitable for ribbed and insulated pipes


SPECIFICATION

Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Socket wrench insert	SW 8 mm
Tightening torque	10,0 Nm
Product standards	EN 681-1, EN 16397, EN 295-4, EN 10088-2

RESISTANCES



Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

Article no.	A Size range	Pressure density	L Length	Weight
C16900	200-225 mm	2,5 bar	300 mm	3.20 kg
C16901	265-290 mm	2,5 bar	300 mm	4.50 kg
C16902	285-310 mm	2,5 bar	300 mm	3.20 kg
C16903	295-320 mm	2,5 bar	300 mm	5.70 kg
C16904	305-335 mm	2,5 bar	300 mm	4.50 kg
C16905	315-345 mm	2,5 bar	300 mm	6.10 kg
C16906	340-360 mm	2,5 bar	300 mm	6.10 kg
C16907	355-385 mm	2,5 bar	300 mm	6.40 kg
C16908	385-410 mm	2,5 bar	300 mm	7.40 kg
C16909	400-425 mm	2,5 bar	300 mm	7.50 kg
C16910	405-430 mm	2,5 bar	300 mm	7.70 kg
C16911	420-445 mm	2,5 bar	300 mm	7.70 kg
C16912	425-450 mm	2,5 bar	300 mm	7.70 kg
C16913	435-465 mm	2,5 bar	300 mm	8.10 kg
C16914	440-470 mm	2,5 bar	300 mm	8.10 kg
C16915	465-490 mm	2,5 bar	300 mm	8.60 kg
C16916	480-510 mm	2,5 bar	300 mm	8.80 kg
C16917	495-525 mm	2,5 bar	300 mm	9.10 kg
C16918	510-540 mm	2,5 bar	300 mm	9.40 kg
C16919	520-550 mm	2,5 bar	300 mm	9.60 kg
C16920	530-560 mm	2,5 bar	300 mm	9.60 kg
C16921	540-570 mm	2,5 bar	300 mm	9.60 kg
C16922	555-580 mm	2,5 bar	300 mm	10.20 kg
C16923	570-600 mm	2,5 bar	300 mm	10.50 kg
C16924	590-620 mm	2,5 bar	300 mm	10.90 kg
C16925	620-635 mm	1,5 bar	300 mm	10.56 kg
C16926	635-650 mm	1,5 bar	300 mm	10.77 kg
C16927	650-665 mm	1,5 bar	300 mm	10.98 kg
C16928	665-680 mm	1,5 bar	300 mm	11.20 kg
C16929	680-695 mm	1,5 bar	300 mm	11.41 kg
C16930	695-710 mm	1,5 bar	300 mm	11.62 kg
C16931	710-725 mm	1,5 bar	300 mm	11.84 kg
C16932	725-740 mm	1,5 bar	300 mm	12.05 kg
C16933	740-755 mm	1,5 bar	300 mm	12.26 kg
C16934	755-770 mm	1,5 bar	300 mm	12.48 kg
C16935	770-785 mm	1,5 bar	300 mm	12.69 kg
C16936	785-800 mm	1,5 bar	300 mm	12.90 kg
C16937	800-815 mm	1,5 bar	300 mm	13.12 kg
C16938	815-830 mm	1,5 bar	300 mm	13.33 kg



Article no.	A Size range	Pressure density	L Length	Weight
C16939	830-845 mm	1,5 bar	300 mm	13.54 kg
C16940	845-860 mm	1,5 bar	300 mm	13.76 kg
C16941	860-875 mm	1,5 bar	300 mm	13.97 kg
C16942	875-890 mm	1,5 bar	300 mm	14.18 kg
C16943	890-905 mm	1,5 bar	300 mm	14.40 kg
C16944	905-920 mm	1,5 bar	300 mm	14.61 kg
C16945	920-935 mm	1,5 bar	300 mm	14.82 kg
C16946	935-950 mm	1,5 bar	300 mm	15.04 kg
C16947	950-965 mm	1,5 bar	300 mm	15.25 kg
C16948	965-980 mm	1,5 bar	300 mm	15.47 kg
C16949	980-995 mm	1,5 bar	300 mm	15.68 kg
C16950	995-1010 mm	1,0 bar	300 mm	15.89 kg
C16951	1010-1025 mm	1,0 bar	300 mm	16.11 kg
C16952	1025-1040 mm	1,0 bar	300 mm	16.32 kg
C16953	1040-1055 mm	1,0 bar	300 mm	16.53 kg
C16954	1055-1070 mm	1,0 bar	300 mm	16.75 kg
C16955	1070-1085 mm	1,0 bar	300 mm	16.96 kg
C16956	1085-1100 mm	1,0 bar	300 mm	17.17 kg
C16957	1100-1115 mm	1,0 bar	300 mm	17.39 kg
C16958	1115-1130 mm	1,0 bar	300 mm	17.60 kg
C16959	1130-1145 mm	1,0 bar	300 mm	17.81 kg
C16960	1145-1160 mm	1,0 bar	300 mm	18.03 kg
C16961	1160-1175 mm	1,0 bar	300 mm	18.24 kg
C16962	1175-1190 mm	1,0 bar	300 mm	18.45 kg

Article no.	A Size range	Pressure density	L Length	Weight
C16963	1190-1205 mm	1,0 bar	300 mm	18.67 kg
C16964	1205-1220 mm	1,0 bar	300 mm	18.88 kg
C16965	1220-1235 mm	1,0 bar	300 mm	19.09 kg
C16966	1235-1250 mm	1,0 bar	300 mm	19.31 kg
C16967	1250-1265 mm	1,0 bar	300 mm	19.52 kg
C16968	1265-1280 mm	1,0 bar	300 mm	19.73 kg
C16969	1280-1295 mm	1,0 bar	300 mm	19.95 kg
C16970	1295-1310 mm	1,0 bar	300 mm	20.16 kg
C16971	1310-1325 mm	1,0 bar	300 mm	20.37 kg
C16972	1325-1340 mm	1,0 bar	300 mm	20.59 kg
C16973	1340-1355 mm	1,0 bar	300 mm	20.80 kg
C16974	1355-1370 mm	1,0 bar	300 mm	21.02 kg
C16975	1370-1385 mm	1,0 bar	300 mm	21.23 kg
C16873	1385-1400 mm	0,6 bar	300 mm	21.44 kg
C16874	1400-1415 mm	0,6 bar	300 mm	21.66 kg
C16875	1415-1430 mm	0,6 bar	300 mm	21.87 kg
C16876	1430-1445 mm	0,6 bar	300 mm	22.08 kg
C16877	1445-1460 mm	0,6 bar	300 mm	22.30 kg
C16878	1460-1475 mm	0,6 bar	300 mm	22.51 kg
C16879	1475-1490 mm	0,6 bar	300 mm	22.72 kg
C16880	1490-1505 mm	0,6 bar	300 mm	22.94 kg
C16881	1505-1520 mm	0,6 bar	300 mm	23.15 kg
C16882	1520-1535 mm	0,6 bar	300 mm	23.36 kg



Article no.	A Size range	Pressure density	L Length	Weight
C16883	1535-1550 mm	0,6 bar	300 mm	23.58 kg
C16884	1550-1565 mm	0,6 bar	300 mm	23.79 kg
C16885	1565-1580 mm	0,6 bar	300 mm	24.00 kg
C16886	1580-1595 mm	0,6 bar	300 mm	24.22 kg
C16887	1595-1610 mm	0,6 bar	300 mm	24.43 kg
C16888	1610-1625 mm	0,6 bar	300 mm	24.64 kg
C16889	1625-1640 mm	0,6 bar	300 mm	24.86 kg
C16890	1640-1655 mm	0,6 bar	300 mm	25.07 kg
C16891	1655-1670 mm	0,6 bar	300 mm	25.28 kg
C16892	1670-1685 mm	0,6 bar	300 mm	25.50 kg
C16893	1685-1700 mm	0,6 bar	300 mm	25.71 kg
C16894	1700-1715 mm	0,6 bar	300 mm	25.93 kg
C16895	1715-1730 mm	0,6 bar	300 mm	26.14 kg
C16896	1730-1745 mm	0,6 bar	300 mm	26.35 kg
C16897	1745-1760 mm	0,6 bar	300 mm	26.57 kg
C16898	1760-1775 mm	0,6 bar	300 mm	26.78 kg
C16899	1775-1790 mm	0,6 bar	300 mm	26.99 kg
C16976	1790-1805 mm	-	300 mm	27.21 kg
C16977	1805-1820 mm	-	300 mm	27.42 kg
C16978	1820-1835 mm	-	300 mm	27.63 kg
C16979	1835-1850 mm	-	300 mm	27.85 kg
C16980	1850-1865 mm	-	300 mm	28.06 kg
C16981	1865-1880 mm	-	300 mm	28.27 kg
C16982	1880-1895 mm	-	300 mm	28.49 kg
C16983	1895-1910 mm	-	300 mm	28.70 kg
C16984	1910-1925 mm	-	300 mm	28.91 kg
C16985	1925-1940 mm	-	300 mm	29.13 kg
C16986	1940-1955 mm	-	300 mm	29.34 kg
C16987	1955-1970 mm	-	300 mm	29.55 kg
C16988	1970-1985 mm	-	300 mm	29.77 kg
C16989	1985-2000 mm	-	300 mm	29.98 kg

geboflex drain coupling



DRAIN COUPLING

External adapter for connecting two piping systems with the same pipe dimensions (DN), as well as for the same or different materials and surface structures; noise-reducing sealing lips; suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material.

FEATURES AND BENEFITS

- Suitable for all waste water pipes
- Durable and maintenance-free connection
- For horizontal and vertical installation
- Noise-reducing sealing element
- UV-resistant, suitable for underground and flush-mounted installation
- Disposal and supply of service water
- Connections in the condensate drain area
- Suitable for supply/exhaust air connections
- Suitable for ribbed and insulated pipes


SPECIFICATION

Pressure density	0.6 bar / 8.7 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Socket wrench insert	SW 8 mm
Product standards	EN 681-1, EN 16397, EN 295-4

RESISTANCES

Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

Article no.	A Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)	Tightening torque
C14048	24-32 mm	68 mm	0.10 kg	5,0°	22 mm	6,0 Nm
C14043	30-35 mm	70 mm	0.11 kg	5,0°	22 mm	6,0 Nm
C14047	32-40 mm	68 mm	0.11 kg	5,0°	22 mm	6,0 Nm
C14044	38-43 mm	70 mm	0.12 kg	5,0°	22 mm	6,0 Nm
C14023	40-50 mm	80 mm	0.19 kg	5,0°	25 mm	6,0 Nm
C14045	48-56 mm	80 mm	0.14 kg	5,0°	25 mm	6,0 Nm
C14024	50-65 mm	90 mm	0.25 kg	5,0°	25 mm	6,0 Nm
C14046	60-68 mm	90 mm	0.19 kg	5,0°	25 mm	6,0 Nm
C14025	65-76 mm	110 mm	0.21 kg	5,0°	35 mm	6,0 Nm
C11019	70-85 mm	120 mm	0.41 kg	5,0°	35 mm	6,0 Nm
C14027	80-95 mm	120 mm	0.40 kg	5,0°	35 mm	6,0 Nm
C14057	85-100 mm	100 mm	0.45 kg	5,0°	30 mm	6,0 Nm
C11018	100-116 mm	120 mm	0.56 kg	5,0°	35 mm	6,0 Nm
C14029	110-125 mm	120 mm	0.60 kg	5,0°	35 mm	6,0 Nm
C14030	120-137 mm	120 mm	0.63 kg	5,0°	35 mm	6,0 Nm
C14031	120-137 mm	120 mm	0.69 kg	5,0°	35 mm	6,0 Nm
C14056	140-165 mm	120 mm	0.70 kg	5,0°	35 mm	6,0 Nm
C14032	150-170 mm	120 mm	0.72 kg	5,0°	35 mm	6,0 Nm
C16202	160-175 mm	120 mm	0.80 kg	5,0°	35 mm	6,0 Nm
C16203	170-185 mm	120 mm	0.81 kg	5,0°	35 mm	6,0 Nm
C16159	180-195 mm	120 mm	0.82 kg	5,0°	35 mm	6,0 Nm
C16204	200-215 mm	150 mm	1.18 kg	5,0°	45 mm	6,0 Nm
C16205	210-225 mm	150 mm	1.02 kg	5,0°	45 mm	6,0 Nm
C16644	235-250 mm	150 mm	1.20 kg	5,0°	45 mm	6,0 Nm
C16145	250-265 mm	150 mm	1.22 kg	3,0°	45 mm	10,0 Nm
C16146	260-275 mm	150 mm	1.46 kg	3,0°	50 mm	10,0 Nm



geboflex standard coupling



STANDARD COUPLING

External adapter for connecting two piping systems with the same pipe dimensions (DN), as well as for the same or different materials and surface structures; suitable for high shear force loads; differences in external diameter of more than 10 mm should be compensated with compensating rings; noise-reducing sealing lips; suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material.

FEATURES AND BENEFITS



- Suitable for all waste water pipes
- Tested quality up to 2.5 bar
- For horizontal and vertical installation
- Optimal for increased shear loads
- UV-resistant, suitable for underground and flush-mounted installation
- Disposal and supply of service water
- Connections in the condensate drain area
- Suitable for supply/exhaust air connections
- Suitable for ribbed and insulated pipes

SPECIFICATION

Pressure density	2.5 bar / 36.3 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Socket wrench insert	SW 8 mm
Product standards	EN 681-1, EN 16397, EN 295-4, EN 10088-2

RESISTANCES

Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓



Article no.	A Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)	Tightening torque
C14033	50-65 mm	90 mm	0.32 kg	5,0°	35 mm	6,0 Nm
C14034	65-76 mm	90 mm	0.43 kg	5,0°	45 mm	6,0 Nm
C14035	70-85 mm	120 mm	0.50 kg	5,0°	50 mm	6,0 Nm
C14036	80-95 mm	120 mm	0.52 kg	5,0°	50 mm	6,0 Nm
C14058	85-100 mm	100 mm	0.55 kg	5,0°	40 mm	6,0 Nm
C14037	100-116 mm	120 mm	0.70 kg	5,0°	50 mm	6,0 Nm
C14038	110-121 mm	120 mm	0.61 kg	5,0°	50 mm	6,0 Nm
C14109	110-125 mm	120 mm	0.77 kg	5,0°	50 mm	6,0 Nm
C14039	120-137 mm	120 mm	0.66 kg	5,0°	50 mm	6,0 Nm
C14040	135-150 mm	120 mm	0.78 kg	5,0°	50 mm	6,0 Nm
C14041	140-165 mm	120 mm	0.86 kg	5,0°	50 mm	6,0 Nm
C14042	150-170 mm	120 mm	0.90 kg	5,0°	50 mm	6,0 Nm
C16216	160-185 mm	120 mm	0.95 kg	5,0°	50 mm	6,0 Nm
C16217	175-200 mm	150 mm	1.25 kg	5,0°	60 mm	6,0 Nm
C16218	190-215 mm	150 mm	1.48 kg	5,0°	60 mm	10,0 Nm
C16219	200-225 mm	150 mm	1.50 kg	5,0°	60 mm	10,0 Nm
C16220	225-250 mm	150 mm	1.56 kg	5,0°	60 mm	10,0 Nm
C16110	240-265 mm	150 mm	1.62 kg	3,0°	60 mm	10,0 Nm
C16221	250-275 mm	150 mm	1.98 kg	3,0°	60 mm	10,0 Nm
C16222	265-290 mm	150 mm	1.70 kg	3,0°	60 mm	10,0 Nm
C16223	285-310 mm	190 mm	2.28 kg	3,0°	70 mm	10,0 Nm
C16224	295-320 mm	190 mm	3.04 kg	3,0°	70 mm	10,0 Nm
C16225	305-335 mm	190 mm	3.32 kg	3,0°	70 mm	10,0 Nm
C16226	315-345 mm	190 mm	3.50 kg	3,0°	70 mm	10,0 Nm
C16227	340-360 mm	190 mm	3.51 kg	3,0°	70 mm	10,0 Nm
C16192	355-385 mm	190 mm	3.65 kg	3,0°	70 mm	10,0 Nm
C16229	385-410 mm	190 mm	3.97 kg	3,0°	70 mm	13,0 Nm
C16111	400-425 mm	190 mm	4.30 kg	3,0°	70 mm	13,0 Nm
C16230	405-430 mm	190 mm	4.40 kg	3,0°	70 mm	13,0 Nm

Article no.	A Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)	Tightening torque
C16231	420-445 mm	190 mm	4.40 kg	3,0°	70 mm	13,0 Nm
C16645	425-450 mm	190 mm	4.40 kg	3,0°	70 mm	13,0 Nm
C16232	435-465 mm	190 mm	4.60 kg	3,0°	70 mm	13,0 Nm
C16646	440-470 mm	190 mm	4.60 kg	3,0°	70 mm	13,0 Nm
C16233	465-490 mm	190 mm	4.90 kg	3,0°	70 mm	13,0 Nm
C16234	480-510 mm	190 mm	5.00 kg	3,0°	70 mm	13,0 Nm
C16235	495-525 mm	190 mm	5.20 kg	3,0°	70 mm	13,0 Nm
C16236	510-540 mm	190 mm	5.20 kg	3,0°	70 mm	13,0 Nm
C16647	520-550 mm	190 mm	5.50 kg	3,0°	70 mm	13,0 Nm
C16237	530-560 mm	190 mm	5.50 kg	3,0°	70 mm	13,0 Nm
C16238	540-570 mm	190 mm	5.50 kg	3,0°	70 mm	13,0 Nm
C16648	555-580 mm	190 mm	5.80 kg	3,0°	70 mm	13,0 Nm
C16239	570-600 mm	190 mm	6.00 kg	3,0°	70 mm	13,0 Nm
C16240	590-620 mm	190 mm	6.20 kg	1,7°	70 mm	13,0 Nm
C16762	620-635 mm	190 mm	7.20 kg	1,7°	70 mm	13,0 Nm
C16778	635-650 mm	190 mm	7.40 kg	1,7°	70 mm	20,0 Nm
C16779	650-665 mm	190 mm	7.40 kg	1,7°	70 mm	20,0 Nm
C16780	665-680 mm	190 mm	7.70 kg	1,7°	70 mm	20,0 Nm



Article no.	A Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)	Tightening torque
C16781	680-695 mm	190 mm	7.80 kg	1,7°	70 mm	20,0 Nm
C16783	695-710 mm	190 mm	8.00 kg	1,7°	70 mm	20,0 Nm
C16784	710-725 mm	190 mm	8.20 kg	1,7°	70 mm	20,0 Nm
C16786	725-740 mm	190 mm	8.30 kg	1,7°	70 mm	20,0 Nm
C16787	740-755 mm	190 mm	8.50 kg	1,7°	70 mm	20,0 Nm
C16788	755-770 mm	190 mm	8.70 kg	1,7°	70 mm	20,0 Nm
C16789	770-785 mm	190 mm	8.80 kg	1,7°	70 mm	20,0 Nm
C16790	785-800 mm	190 mm	9.10 kg	1,7°	70 mm	20,0 Nm
C16792	800-815 mm	190 mm	9.20 kg	1,7°	70 mm	20,0 Nm
C16793	815-830 mm	190 mm	9.30 kg	1,7°	70 mm	20,0 Nm
C16794	830-845 mm	190 mm	9.50 kg	1,7°	70 mm	20,0 Nm
C16796	845-860 mm	190 mm	9.70 kg	1,7°	70 mm	20,0 Nm
C16797	860-875 mm	190 mm	9.80 kg	1,7°	70 mm	20,0 Nm
C16760	875-890 mm	190 mm	10.00 kg	1,7°	70 mm	20,0 Nm
C16798	890-905 mm	190 mm	10.10 kg	1,7°	70 mm	20,0 Nm
C16800	905-920 mm	190 mm	10.30 kg	1,7°	70 mm	20,0 Nm
C16801	920-935 mm	190 mm	10.50 kg	1,7°	70 mm	20,0 Nm
C16802	935-950 mm	190 mm	10.60 kg	1,7°	70 mm	20,0 Nm



Article no.	A Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)	Tightening torque
C16803	950-965 mm	190 mm	10.80 kg	1,7°	70 mm	20,0 Nm
C16805	965-980 mm	190 mm	11.00 kg	1,7°	70 mm	20,0 Nm
C16806	980-995 mm	190 mm	11.30 kg	1,7°	70 mm	20,0 Nm
C16807	995-1010 mm	190 mm	11.30 kg	1,7°	70 mm	20,0 Nm
C16808	1010-1025 mm	190 mm	11.10 kg	1,7°	70 mm	25,0 Nm
C16809	1025-1040 mm	190 mm	11.60 kg	0,6°	70 mm	25,0 Nm
C16810	1040-1055 mm	190 mm	11.80 kg	0,6°	70 mm	25,0 Nm
C16811	1055-1070 mm	190 mm	12.00 kg	0,6°	70 mm	25,0 Nm
C16812	1070-1085 mm	190 mm	12.10 kg	0,6°	70 mm	25,0 Nm
C16813	1085-1100 mm	190 mm	12.30 kg	0,6°	70 mm	25,0 Nm
C16761	1100-1115 mm	190 mm	12.50 kg	0,6°	70 mm	25,0 Nm
C16814	1115-1130 mm	190 mm	12.60 kg	0,6°	70 mm	25,0 Nm
C16815	1130-1145 mm	190 mm	12.80 kg	0,6°	70 mm	25,0 Nm
C16816	1145-1160 mm	190 mm	12.90 kg	0,6°	70 mm	25,0 Nm
C16817	1160-1175 mm	190 mm	13.10 kg	0,6°	70 mm	25,0 Nm
C16818	1175-1190 mm	190 mm	13.30 kg	0,6°	70 mm	25,0 Nm
C16819	1190-1205 mm	190 mm	13.40 kg	0,6°	70 mm	25,0 Nm
C16820	1205-1220 mm	190 mm	13.60 kg	0,6°	70 mm	25,0 Nm
C16821	1220-1235 mm	190 mm	13.80 kg	0,6°	70 mm	25,0 Nm
C16822	1235-1250 mm	190 mm	13.90 kg	0,6°	70 mm	25,0 Nm
C16823	1250-1265 mm	190 mm	14.10 kg	0,6°	70 mm	25,0 Nm
C16824	1265-1280 mm	190 mm	14.30 kg	0,6°	70 mm	25,0 Nm
C16825	1280-1295 mm	190 mm	14.40 kg	0,6°	70 mm	25,0 Nm
C16826	1295-1310 mm	190 mm	14.60 kg	0,6°	70 mm	25,0 Nm
C16827	1310-1325 mm	190 mm	14.80 kg	0,6°	70 mm	25,0 Nm
C16828	1325-1340 mm	190 mm	14.80 kg	0,6°	70 mm	25,0 Nm
C16829	1340-1355 mm	190 mm	15.10 kg	0,6°	70 mm	25,0 Nm
C16830	1355-1370 mm	190 mm	15.30 kg	0,6°	70 mm	25,0 Nm
C16832	1370-1385 mm	190 mm	15.40 kg	0,6°	70 mm	25,0 Nm
C16831	1385-1400 mm	190 mm	15.60 kg	0,6°	70 mm	25,0 Nm
C16833	1400-1415 mm	190 mm	15.80 kg	0,6°	70 mm	25,0 Nm
C16834	1415-1430 mm	190 mm	15.90 kg	0,6°	70 mm	25,0 Nm
C16835	1430-1445 mm	190 mm	16.10 kg	0,6°	70 mm	25,0 Nm
C16836	1445-1460 mm	190 mm	16.20 kg	0,6°	70 mm	25,0 Nm
C16837	1460-1475 mm	190 mm	16.40 kg	0,6°	70 mm	25,0 Nm

Article no.	A Size range	L Length	Weight	Angular deviation (max.)	Insertion depth (min.)	Tightening torque
C16838	1475-1490 mm	190 mm	16.60 kg	0,6°	70 mm	25,0 Nm
C16839	1490-1505 mm	190 mm	16.70 kg	0,6°	70 mm	25,0 Nm
C16840	1505-1520 mm	190 mm	16.90 kg	0,6°	70 mm	25,0 Nm
C16841	1520-1535 mm	190 mm	17.10 kg	0,6°	70 mm	25,0 Nm
C16842	1535-1550 mm	190 mm	17.20 kg	0,6°	70 mm	25,0 Nm
C16843	1550-1565 mm	190 mm	17.40 kg	0,6°	70 mm	25,0 Nm
C16844	1565-1580 mm	190 mm	17.60 kg	0,6°	70 mm	25,0 Nm
C16845	1580-1595 mm	190 mm	17.70 kg	0,6°	70 mm	25,0 Nm
C16846	1595-1610 mm	190 mm	17.90 kg	0,6°	70 mm	25,0 Nm
C16847	1610-1625 mm	190 mm	18.10 kg	0,6°	70 mm	25,0 Nm
C16848	1625-1640 mm	190 mm	18.20 kg	0,6°	70 mm	25,0 Nm
C16849	1640-1655 mm	190 mm	18.40 kg	0,6°	70 mm	25,0 Nm
C16850	1655-1670 mm	190 mm	18.60 kg	0,6°	70 mm	25,0 Nm
C16851	1670-1685 mm	190 mm	18.40 kg	0,6°	70 mm	25,0 Nm
C16852	1685-1700 mm	190 mm	18.90 kg	0,6°	70 mm	25,0 Nm
C16853	1700-1715 mm	190 mm	19.00 kg	0,6°	70 mm	25,0 Nm
C16854	1715-1730 mm	190 mm	19.20 kg	0,6°	70 mm	25,0 Nm
C16855	1730-1745 mm	190 mm	19.40 kg	0,6°	70 mm	25,0 Nm
C16856	1745-1760 mm	190 mm	19,50 kg	0,6°	70 mm	25,0 Nm
C16857	1760-1775 mm	190 mm	19.70 kg	0,6°	70 mm	25,0 Nm
C16858	1775-1790 mm	190 mm	19.90 kg	0,6°	70 mm	25,0 Nm
C16859	1790-1805 mm	190 mm	20.10 kg	0,6°	70 mm	25,0 Nm
C16860	1805-1820 mm	190 mm	20.20 kg	0,6°	70 mm	25,0 Nm
C16861	1820-1835 mm	190 mm	20.40 kg	0,6°	70 mm	25,0 Nm
C16862	1835-1850 mm	190 mm	20.60 kg	0,6°	70 mm	25,0 Nm
C16863	1850-1865 mm	190 mm	20.70 kg	0,6°	70 mm	25,0 Nm
C16864	1865-1880 mm	190 mm	20.80 kg	0,6°	70 mm	25,0 Nm
C16865	1880-1895 mm	190 mm	21.00 kg	0,6°	70 mm	25,0 Nm
C16866	1895-1910 mm	190 mm	21.20 kg	0,6°	70 mm	25,0 Nm
C16867	1910-1925 mm	190 mm	21.40 kg	0,6°	70 mm	25,0 Nm
C16868	1925-1940 mm	190 mm	21.50 kg	0,6°	70 mm	25,0 Nm
C16869	1940-1955 mm	190 mm	21.70 kg	0,6°	70 mm	25,0 Nm
C16870	1955-1970 mm	190 mm	21.90 kg	0,6°	70 mm	25,0 Nm
C16871	1970-1985 mm	190 mm	22.00 kg	0,6°	70 mm	25,0 Nm
C16872	1985-2000 mm	190 mm	22.20 kg	0,6°	70 mm	25,0 Nm

geboflex end caps



OUTSIDE END CAPS

External end cap for sealing pipes with spigot end; suitable for permanent or temporary closure, suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material.

FEATURES AND BENEFITS

- Suitable for all waste water pipes
- Axial and radial pressure distribution
- For horizontal and vertical installation
- Closure in the condensate drain area
- UV-resistant, suitable for underground and flush-mounted installation
- Tested quality up to 0.6 bar
- Closure for supply/exhaust air
- Suitable for ribbed and insulated pipes



SPECIFICATION

Pressure density	0.6 bar / 8.7 PSI
Socket wrench insert	SW 8 mm
Tightening torque	6,0 Nm
Product standards	EN 681-1

RESISTANCES

Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓






Article no.	A Size range	L Length	Weight
C15756	28-36 mm	40 mm	0.06 kg
C15074	37-45 mm	40 mm	0.08 kg
C15757	45-56 mm	40 mm	0.09 kg
C15075	58-68 mm	40 mm	0.11 kg
C15758	67-76 mm	40 mm	0.12 kg
C15759	76-85 mm	44 mm	0.15 kg
C15076	82-92 mm	44 mm	0.15 kg
C15077	105-115 mm	54 mm	0.22 kg
C15078	125-135 mm	54 mm	0.29 kg
C15079	155-165 mm	54 mm	0.40 kg
C18761	180-190 mm	54 mm	0.61 kg
C18762	200-215 mm	54 mm	1.02 kg
C15767	235-250 mm	54 mm	0.80 kg
C15768	255-270 mm	54 mm	0.80 kg
C15769	300-315 mm	54 mm	1.00 kg
C15770	345-360 mm	54 mm	1.23 kg



geboflex inside end caps PVC



INSIDE END CAPS (PVC)

Internal quick-release plug for sealing a piping system; suitable for permanent or temporary closure; wing nut for tightening; hollow screw also serves as a test connection for water pressure testing; suitable for horizontal or vertical installation; UV and weather-resistant material.

FEATURES AND BENEFITS

- Suitable for all pipes
- Multiple use possible
- For horizontal and vertical installation
- Closure in the condensate drain area
- UV-resistant, suitable for underground and flush-mounted installation
- Incl. test / drain valve
- Closure for supply/exhaust air
- Suitable for ribbed and insulated pipes
- Aluminum plug ideal for pressure tests


SPECIFICATION

Pressure density	0.5 bar / 7.3 PSI
Product standards	EN 681-1



RESISTANCES

Heat resistant	95 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓




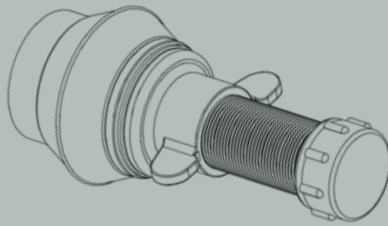

Article no.	A Size range	B Test connection	L Length	Weight
C18645	23-32 mm	-	60 mm	0.04 kg
C18646	31-42 mm	-	70 mm	0.05 kg
C18647	37-54 mm	1/2 Inch	100 mm	0.06 kg
C18637	48-65 mm	1/2 Inch	100 mm	0.07 kg
C18638	60-77 mm	1/2 Inch	100 mm	0.11 kg
C18639	70-87 mm	1/2 Inch	100 mm	0.12 kg
C18640	83-97 mm	1/2 Inch	100 mm	0.12 kg
C18641	95-110 mm	1/2 Inch	100 mm	0.14 kg
C18642	114-130 mm	1/2 Inch	100 mm	0.22 kg
C18643	118-142 mm	1/2 Inch	100 mm	0.22 kg
C18644	148-162 mm	1/2 Inch	100 mm	0.30 kg

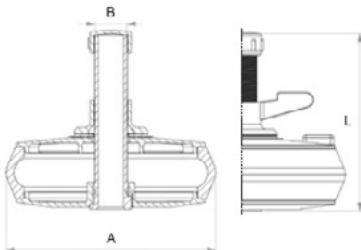

geboflex inside end caps



INSIDE END CAPS

Internal quick-release plug for sealing a piping system; suitable for permanent or temporary closure; wing nut for tightening; hollow screw also serves as a test connection for water pressure testing; suitable for horizontal or vertical installation; UV and weather-resistant material.

FEATURES AND BENEFITS


- Suitable for all pipes
- Multiple use possible
- For horizontal and vertical installation
- Closure in the condensate drain area
- UV-resistant, suitable for underground and flush-mounted installation
- Incl. test / drain valve
- Closure for supply/exhaust air
- Suitable for ribbed and insulated pipes
- Aluminum plug ideal for pressure tests

SPECIFICATION

Pressure density	0.5 bar / 7.3 PSI
Product standards	EN 681-1

RESISTANCES

Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓



Article no.	A Size range	B Test connection	L Length	Weight
C18619	37-48 mm	1/2 Inch	100 mm	0.15 kg
C18620	48-62 mm	1/2 Inch	100 mm	0.16 kg
C18621	62-70 mm	1/2 Inch	100 mm	0.20 kg
C18622	71-87 mm	1/2 Inch	100 mm	0.25 kg
C18623	89-94 mm	1/2 Inch	100 mm	0.27 kg
C18624	94-108 mm	1/2 Inch	100 mm	0.34 kg
C18625	108-120 mm	1/2 Inch	100 mm	0.48 kg
C18626	121-137 mm	1/2 Inch	100 mm	0.57 kg
C18627	148-165 mm	1/2 Inch	100 mm	0.70 kg
C18628	178-185 mm	1 Inch	150 mm	1.34 kg
C18629	180-205 mm	1 Inch	150 mm	1.52 kg
C18630	213-230 mm	1 Inch	150 mm	1.50 kg
C18631	240-255 mm	1 Inch	150 mm	1.70 kg
C18632	298-315 mm	1 Inch	250 mm	3.00 kg

geboflex flexible branch



FLEXIBLE BRANCH


Branch with T-angle (90°) for connecting two piping systems with the same pipe dimensions (DN), as well as for the same or different materials and surface structures; suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material; noise-reducing.

SPECIFICATION

Pressure density	0.6 bar / 8.7 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Socket wrench insert	SW 8 mm
Tightening torque	6,0 Nm
Product standards	EN 681-1

RESISTANCES

Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

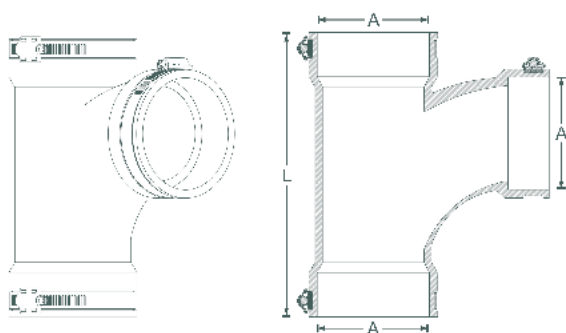

Article no.	A Size range	L Length	Weight
C15082	30-38 mm	120 mm	0.18 kg
C15070	40-50 mm	135 mm	0.22 kg
C15071	50-60 mm	150 mm	0.28 kg
C15072	78-90 mm	205 mm	0.59 kg
C15073	106-118 mm	260 mm	0.93 kg



geboflex flexible bend



FLEXIBLE BEND

90-degree bend for connecting two piping systems with the same pipe dimensions (DN), as well as for the same or different materials and surface structures; suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material; noise-reducing.

SPECIFICATION


Pressure density	0.6 bar / 8.7 PSI
Vacuum pressure density	-0,3 bar
High-pressure flushing resistance	120 bar
Socket wrench insert	SW 8 mm
Tightening torque	6,0 Nm
Product standards	EN 681-1


RESISTANCES


Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓



Article no.	A Size range	L Length	Weight
C15081	30-38 mm	80 mm	0.12 kg
C15066	40-50 mm	100 mm	0.16 kg
C15067	50-60 mm	110 mm	0.20 kg
C15068	78-90 mm	160 mm	0.41 kg
C15069	106-118 mm	220 mm	0.68 kg

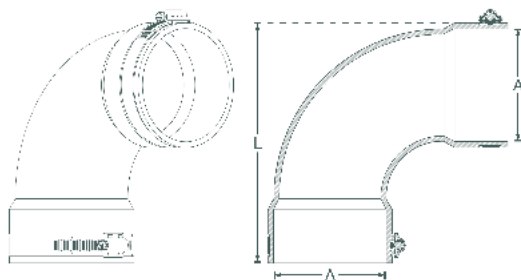

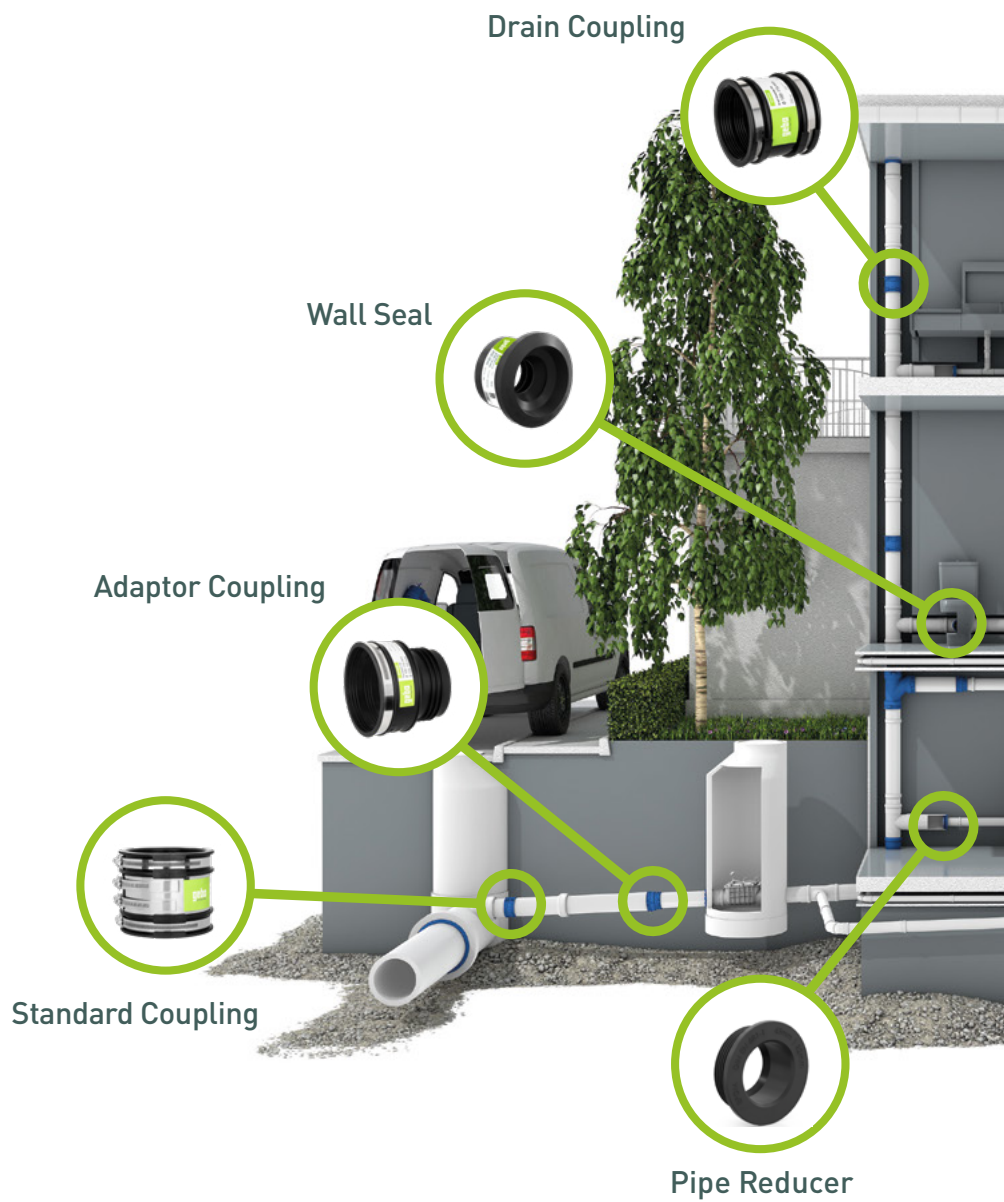

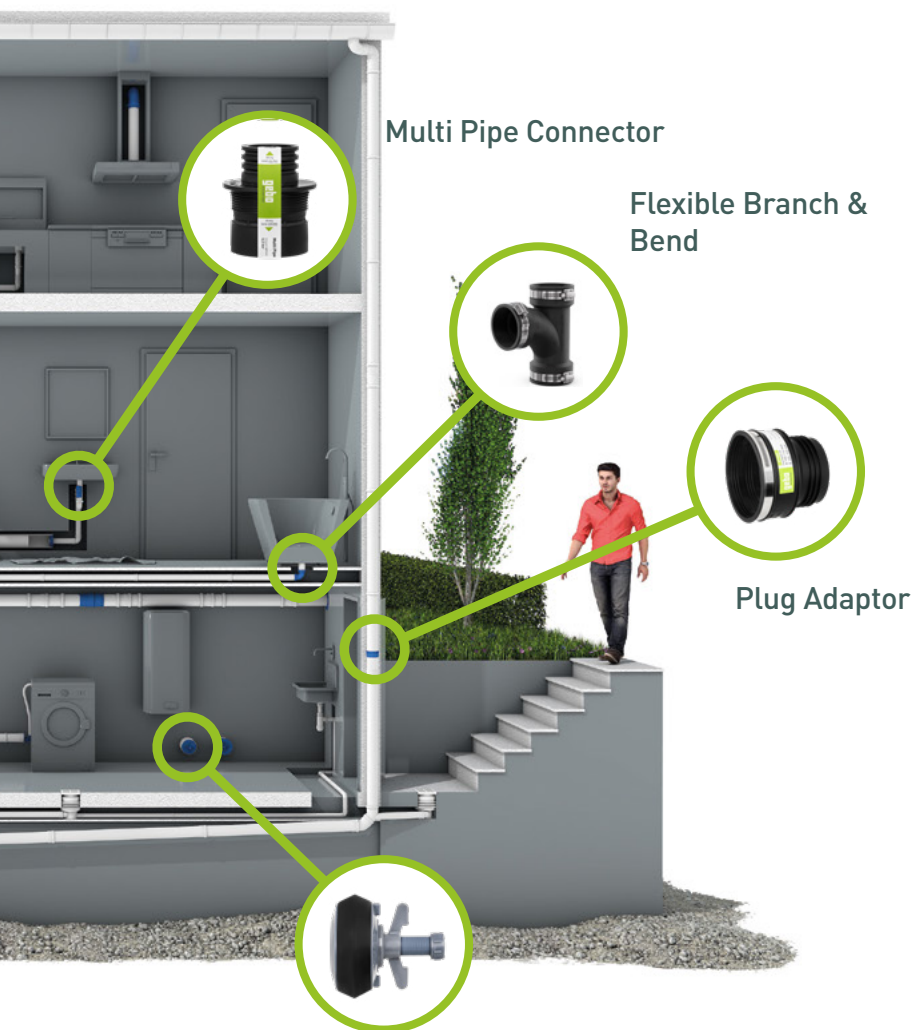

Multi Pipe Connector

Flexible Branch & Bend

Plug Adaptor

Inside End Cap

GEBO BALTICS

Peterburi tee 46, office 207
Tallinn, Harju maakond,
Estonia, 11415

T. +372 6004545

gebo-online.ee

