

# gebonipple

**BARREL NIPPLES AND SOCKS -  
GALVANIZED OR BLACK.**





**BARREL NIPPEL**

S. 3


Barrel nipple from 1/8" up to 4", 30 mm – 2000 mm length

**SOCKETS**

S. 9

Sockets from 1/8" up to 4"

BARREL NIPPLE GALVANIZED OR BLACK

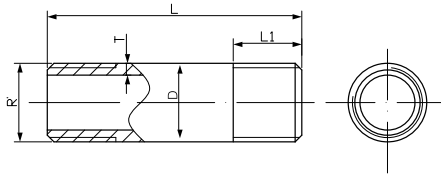

**PARAMETERS:** following to DIN EN 10241

**MATERIAL:** steel pipe according to DIN EN 10255

**THREADS:** accordingly to ISO 7/1


| Thread size (R) |   |        | Code galvanized | Code black     | Dimension [mm] |     |     |      |
|-----------------|---|--------|-----------------|----------------|----------------|-----|-----|------|
| x (L) length    |   |        | Barrel nipples  | Barrel nipples | D              | T   | L   | L1   |
| 1/8"            | x | 30 mm  | 70.030.01V      | 70.030.01S     | 10,2           | 2,0 | 30  | 9,2  |
| 1/8"            | x | 40 mm  | 70.040.01V      | 70.040.01S     | 10,2           | 2,0 | 40  | 9,2  |
| 1/8"            | x | 50 mm  | 70.050.01V      | 70.050.01S     | 10,2           | 2,0 | 50  | 9,2  |
| 1/8"            | x | 60 mm  | 70.050.01V      | 70.050.01S     | 10,2           | 2,0 | 60  | 9,2  |
| 1/8"            | x | 70 mm  | 70.070.01V      | 70.070.01S     | 10,2           | 2,0 | 70  | 9,2  |
| 1/8"            | x | 80 mm  | 70.080.01V      | 70.080.01S     | 10,2           | 2,0 | 80  | 9,2  |
| 1/8"            | x | 100 mm | 70.100.01V      | 70.100.01S     | 10,2           | 2,0 | 100 | 9,2  |
| 1/8"            | x | 120 mm | 70.120.01V      | 70.120.01S     | 10,2           | 2,0 | 120 | 9,2  |
| 1/8"            | x | 150 mm | 70.150.01V      | 70.150.01S     | 10,2           | 2,0 | 150 | 9,2  |
| 1/8"            | x | 180 mm | 70.180.01V      | 70.180.01S     | 10,2           | 2,0 | 180 | 9,2  |
| 1/8"            | x | 200 mm | 70.200.01V      | 70.200.01S     | 10,2           | 2,0 | 200 | 9,2  |
| 1/8"            | x | 250 mm | 70.250.01V      | 70.250.01S     | 10,2           | 2,0 | 250 | 9,2  |
| 1/8"            | x | 300 mm | 70.300.01V      | 70.300.01S     | 10,2           | 2,0 | 300 | 9,2  |
|                 |   |        |                 |                |                |     |     |      |
| 1/4"            | x | 30 mm  | 70.030.02V      | 70.030.02S     | 13,5           | 2,3 | 30  | 13,7 |
| 1/4"            | x | 40 mm  | 70.040.02V      | 70.040.02S     | 13,5           | 2,3 | 40  | 13,7 |
| 1/4"            | x | 50 mm  | 70.050.02V      | 70.050.02S     | 13,5           | 2,3 | 50  | 13,7 |
| 1/4"            | x | 60 mm  | 70.060.02V      | 70.060.02S     | 13,5           | 2,3 | 60  | 13,7 |
| 1/4"            | x | 80 mm  | 70.080.02V      | 70.080.02S     | 13,5           | 2,3 | 80  | 13,7 |
| 1/4"            | x | 100 mm | 70.100.02V      | 70.100.02S     | 13,5           | 2,3 | 100 | 13,7 |
| 1/4"            | x | 120 mm | 70.120.02V      | 70.120.02S     | 13,5           | 2,3 | 120 | 13,7 |
| 1/4"            | x | 140 mm | 70.140.02V      | 70.140.02S     | 13,5           | 2,3 | 140 | 13,7 |
| 1/4"            | x | 150 mm | 70.150.02V      | 70.150.02S     | 13,5           | 2,3 | 150 | 13,7 |
| 1/4"            | x | 160 mm | 70.160.02V      | 70.160.02S     | 13,5           | 2,3 | 160 | 13,7 |
| 1/4"            | x | 180 mm | 70.180.02V      | 70.180.02S     | 13,5           | 2,3 | 180 | 13,7 |
| 1/4"            | x | 200 mm | 70.200.02V      | 70.200.02S     | 13,5           | 2,3 | 200 | 13,7 |
| 1/4"            | x | 250 mm | 70.250.02V      | 70.250.02S     | 13,5           | 2,3 | 250 | 13,7 |
| 1/4"            | x | 300 mm | 70.300.02V      | 70.300.02S     | 13,5           | 2,3 | 300 | 13,7 |
|                 |   |        |                 |                |                |     |     |      |
| 3/8"            | x | 30 mm  | 70.030.03V      | 70.030.03S     | 17,2           | 2,3 | 30  | 12,0 |
| 3/8"            | x | 40 mm  | 70.040.03V      | 70.040.03S     | 17,2           | 2,3 | 40  | 12,0 |
| 3/8"            | x | 50 mm  | 70.050.03V      | 70.050.03S     | 17,2           | 2,3 | 50  | 12,0 |
| 3/8"            | x | 60 mm  | 70.060.03V      | 70.060.03S     | 17,2           | 2,3 | 60  | 12,0 |
| 3/8"            | x | 70 mm  | 70.070.03V      | 70.070.03S     | 17,2           | 2,3 | 70  | 12,0 |
| 3/8"            | x | 80 mm  | 70.080.03V      | 70.080.03S     | 17,2           | 2,3 | 80  | 12,0 |
| 3/8"            | x | 100 mm | 70.100.03V      | 70.100.03S     | 17,2           | 2,3 | 100 | 12,0 |
| 3/8"            | x | 120 mm | 70.120.03V      | 70.120.03S     | 17,2           | 2,3 | 120 | 12,0 |
| 3/8"            | x | 130 mm | 70.130.03V      | 70.130.03S     | 17,2           | 2,3 | 130 | 12,0 |
| 3/8"            | x | 150 mm | 70.150.03V      | 70.150.03S     | 17,2           | 2,3 | 150 | 12,0 |
| 3/8"            | x | 180 mm | 70.180.03V      | 70.180.03S     | 17,2           | 2,3 | 180 | 12,0 |
| 3/8"            | x | 200 mm | 70.200.03V      | 70.200.03S     | 17,2           | 2,3 | 200 | 12,0 |
| 3/8"            | x | 250 mm | 70.250.03V      | 70.250.03S     | 17,2           | 2,3 | 250 | 12,0 |
| 3/8"            | x | 300 mm | 70.300.03V      | 70.300.03S     | 17,2           | 2,3 | 300 | 12,0 |

| Thread size (R) |   |         | Code galvanized | Code black     | Dimension [mm] |     |      |      |
|-----------------|---|---------|-----------------|----------------|----------------|-----|------|------|
| x (L) length    |   |         | Barrel nipples  | Barrel nipples | D              | T   | L    | L1   |
| 1/2"            | x | 30 mm   | 70.030.04V      | 70.030.04S     | 21,3           | 2,6 | 30   | 15,0 |
| 1/2"            | x | 40 mm   | 70.040.04V      | 70.040.04S     | 21,3           | 2,6 | 40   | 15,0 |
| 1/2"            | x | 50 mm   | 70.050.04V      | 70.050.04S     | 21,3           | 2,6 | 50   | 15,0 |
| 1/2"            | x | 60 mm   | 70.060.04V      | 70.060.04S     | 21,3           | 2,6 | 60   | 15,0 |
| 1/2"            | x | 70 mm   | 70.070.04V      | 70.070.04S     | 21,3           | 2,6 | 70   | 15,0 |
| 1/2"            | x | 80 mm   | 70.080.04V      | 70.080.04S     | 21,3           | 2,6 | 80   | 15,0 |
| 1/2"            | x | 90 mm   | 70.090.04V      | 70.090.04S     | 21,3           | 2,6 | 90   | 15,0 |
| 1/2"            | x | 100 mm  | 70.100.04V      | 70.100.04S     | 21,3           | 2,6 | 100  | 15,0 |
| 1/2"            | x | 110 mm  | 70.110.04V      | 70.110.04S     | 21,3           | 2,6 | 110  | 15,0 |
| 1/2"            | x | 120 mm  | 70.120.04V      | 70.120.04S     | 21,3           | 2,6 | 120  | 15,0 |
| 1/2"            | x | 130 mm  | 70.130.04V      | 70.130.04S     | 21,3           | 2,6 | 130  | 15,0 |
| 1/2"            | x | 140 mm  | 70.140.04V      | 70.140.04S     | 21,3           | 2,6 | 140  | 15,0 |
| 1/2"            | x | 150 mm  | 70.150.04V      | 70.150.04S     | 21,3           | 2,6 | 150  | 15,0 |
| 1/2"            | x | 160 mm  | 70.160.04V      | 70.160.04S     | 21,3           | 2,6 | 160  | 15,0 |
| 1/2"            | x | 180 mm  | 70.180.04V      | 70.180.04S     | 21,3           | 2,6 | 180  | 15,0 |
| 1/2"            | x | 200 mm  | 70.200.04V      | 70.200.04S     | 21,3           | 2,6 | 200  | 15,0 |
| 1/2"            | x | 300 mm  | 70.300.04V      | 70.300.04S     | 21,3           | 2,6 | 300  | 15,0 |
| 1/2"            | x | 400 mm  | 70.400.04V      | 70.400.04S     | 21,3           | 2,6 | 400  | 15,0 |
| 1/2"            | x | 500 mm  | 70.500.04V      | 70.500.04S     | 21,3           | 2,6 | 500  | 15,0 |
| 1/2"            | x | 1000 mm | 70.1000.04V     | 70.1000.04S    | 21,3           | 2,6 | 1000 | 15,0 |
| 1/2"            | x | 1500 mm | 70.1500.04V     | 70.1500.04S    | 21,3           | 2,6 | 1500 | 15,0 |
| 1/2"            | x | 2000 mm | 70.2000.04V     | 70.2000.04S    | 21,3           | 2,6 | 2000 | 15,0 |
|                 |   |         |                 |                |                |     |      |      |
| 3/4"            | x | 30 mm   | 70.030.05V      | 70.030.05S     | 26,9           | 2,6 | 30   | 15,0 |
| 3/4"            | x | 40 mm   | 70.040.05V      | 70.040.05S     | 26,9           | 2,6 | 40   | 15,0 |
| 3/4"            | x | 50 mm   | 70.050.05V      | 70.050.05S     | 26,9           | 2,6 | 50   | 15,0 |
| 3/4"            | x | 60 mm   | 70.060.05V      | 70.060.05S     | 26,9           | 2,6 | 60   | 15,0 |
| 3/4"            | x | 70 mm   | 70.070.05V      | 70.070.05S     | 26,9           | 2,6 | 70   | 15,0 |
| 3/4"            | x | 80 mm   | 70.080.05V      | 70.080.05S     | 26,9           | 2,6 | 80   | 15,0 |
| 3/4"            | x | 90 mm   | 70.090.05V      | 70.090.05S     | 26,9           | 2,6 | 90   | 15,0 |
| 3/4"            | x | 100 mm  | 70.100.05V      | 70.100.05S     | 26,9           | 2,6 | 100  | 15,0 |
| 3/4"            | x | 110 mm  | 70.110.05V      | 70.110.05S     | 26,9           | 2,6 | 110  | 15,0 |
| 3/4"            | x | 120 mm  | 70.120.05V      | 70.120.05S     | 26,9           | 2,6 | 120  | 15,0 |
| 3/4"            | x | 130 mm  | 70.130.05V      | 70.130.05S     | 26,9           | 2,6 | 130  | 15,0 |
| 3/4"            | x | 140 mm  | 70.140.05V      | 70.140.05S     | 26,9           | 2,6 | 140  | 15,0 |
| 3/4"            | x | 150 mm  | 70.150.05V      | 70.150.05S     | 26,9           | 2,6 | 150  | 15,0 |
| 3/4"            | x | 160 mm  | 70.160.05V      | 70.160.05S     | 26,9           | 2,6 | 160  | 15,0 |
| 3/4"            | x | 180 mm  | 70.180.05V      | 70.180.05S     | 26,9           | 2,6 | 180  | 15,0 |
| 3/4"            | x | 200 mm  | 70.200.05V      | 70.200.05S     | 26,9           | 2,6 | 200  | 15,0 |
| 3/4"            | x | 250 mm  | 70.250.05V      | 70.250.05S     | 26,9           | 2,6 | 250  | 15,0 |
| 3/4"            | x | 300 mm  | 70.300.05V      | 70.300.05S     | 26,9           | 2,6 | 300  | 15,0 |
| 3/4"            | x | 400 mm  | 70.400.05V      | 70.400.05S     | 26,9           | 2,6 | 400  | 15,0 |
| 3/4"            | x | 500 mm  | 70.500.05V      | 70.500.05S     | 26,9           | 2,6 | 500  | 15,0 |
| 3/4"            | x | 1000 mm | 70.1000.05V     | 70.1000.05S    | 26,9           | 2,6 | 1000 | 15,0 |
| 3/4"            | x | 1500 mm | 70.1500.05V     | 70.1500.05S    | 26,9           | 2,6 | 1500 | 15,0 |
| 3/4"            | x | 2000 mm | 70.2000.05V     | 70.2000.05S    | 26,9           | 2,6 | 2000 | 15,0 |
|                 |   |         |                 |                |                |     |      |      |
| 1"              | x | 30 mm   | 70.030.06V      | 70.030.06S     | 33,7           | 3,2 | 30   | 17,0 |
| 1"              | x | 40 mm   | 70.040.06V      | 70.040.06S     | 33,7           | 3,2 | 40   | 17,0 |
| 1"              | x | 50 mm   | 70.050.06V      | 70.050.06S     | 33,7           | 3,2 | 50   | 17,0 |
| 1"              | x | 60 mm   | 70.060.06V      | 70.060.06S     | 33,7           | 3,2 | 60   | 17,0 |
| 1"              | x | 70 mm   | 70.070.06V      | 70.070.06S     | 33,7           | 3,2 | 70   | 17,0 |
| 1"              | x | 80 mm   | 70.080.06V      | 70.080.06S     | 33,7           | 3,2 | 80   | 17,0 |
| 1"              | x | 90 mm   | 70.090.06V      | 70.090.06S     | 33,7           | 3,2 | 90   | 17,0 |
| 1"              | x | 100 mm  | 70.100.06V      | 70.100.06S     | 33,7           | 3,2 | 100  | 17,0 |
| 1"              | x | 110 mm  | 70.110.06V      | 70.110.06S     | 33,7           | 3,2 | 110  | 17,0 |
| 1"              | x | 120 mm  | 70.120.06V      | 70.120.06S     | 33,7           | 3,2 | 120  | 17,0 |
| 1"              | x | 130 mm  | 70.130.06V      | 70.130.06S     | 33,7           | 3,2 | 130  | 17,0 |
| 1"              | x | 140 mm  | 70.140.06V      | 70.140.06S     | 33,7           | 3,2 | 140  | 17,0 |
| 1"              | x | 150 mm  | 70.150.06V      | 70.150.06S     | 33,7           | 3,2 | 150  | 17,0 |
| 1"              | x | 160 mm  | 70.160.06V      | 70.160.06S     | 33,7           | 3,2 | 160  | 17,0 |
| 1"              | x | 180 mm  | 70.180.06V      | 70.180.06S     | 33,7           | 3,2 | 180  | 17,0 |
| 1"              | x | 200 mm  | 70.200.06V      | 70.200.06S     | 33,7           | 3,2 | 200  | 17,0 |
| 1"              | x | 250 mm  | 70.250.06V      | 70.250.06S     | 33,7           | 3,2 | 250  | 17,0 |
| 1"              | x | 300 mm  | 70.300.06V      | 70.300.06S     | 33,7           | 3,2 | 300  | 17,0 |
| 1"              | x | 400 mm  | 70.400.06V      | 70.400.06S     | 33,7           | 3,2 | 400  | 17,0 |
| 1"              | x | 500 mm  | 70.500.06V      | 70.500.06S     | 33,7           | 3,2 | 500  | 17,0 |
| 1"              | x | 600 mm  | 70.600.06V      | 70.600.06S     | 33,7           | 3,2 | 600  | 17,0 |
| 1"              | x | 1000 mm | 70.1000.06V     | 70.1000.06S    | 33,7           | 3,2 | 1000 | 17,0 |
| 1"              | x | 1500 mm | 70.1500.06V     | 70.1500.06S    | 33,7           | 3,2 | 1500 | 17,0 |
| 1"              | x | 2000 mm | 70.2000.06V     | 70.2000.06S    | 33,7           | 3,2 | 2000 | 17,0 |

| Thread size (R) |   |         | Code galvanized | Code black     | Dimension [mm] |     |      |      |
|-----------------|---|---------|-----------------|----------------|----------------|-----|------|------|
| x (L) length    |   |         | Barrel nipples  | Barrel nipples | D              | T   | L    | L1   |
| 1 1/4"          | x | 40 mm   | 70.040.07V      | 70.040.07S     | 42,4           | 3,2 | 40   | 20,0 |
| 1 1/4"          | x | 50 mm   | 70.050.07V      | 70.050.07S     | 42,4           | 3,2 | 50   | 20,0 |
| 1 1/4"          | x | 60 mm   | 70.060.07V      | 70.060.07S     | 42,4           | 3,2 | 60   | 20,0 |
| 1 1/4"          | x | 70 mm   | 70.070.07V      | 70.070.07S     | 42,4           | 3,2 | 70   | 20,0 |
| 1 1/4"          | x | 80 mm   | 70.080.07V      | 70.080.07S     | 42,4           | 3,2 | 80   | 20,0 |
| 1 1/4"          | x | 100 mm  | 70.100.07V      | 70.100.07S     | 42,4           | 3,2 | 100  | 20,0 |
| 1 1/4"          | x | 110 mm  | 70.110.07V      | 70.110.07S     | 42,4           | 3,2 | 110  | 20,0 |
| 1 1/4"          | x | 120 mm  | 70.120.07V      | 70.120.07S     | 42,4           | 3,2 | 120  | 20,0 |
| 1 1/4"          | x | 140 mm  | 70.140.07V      | 70.140.07S     | 42,4           | 3,2 | 140  | 20,0 |
| 1 1/4"          | x | 150 mm  | 70.150.07V      | 70.150.07S     | 42,4           | 3,2 | 150  | 20,0 |
| 1 1/4"          | x | 160 mm  | 70.160.07V      | 70.160.07S     | 42,4           | 3,2 | 160  | 20,0 |
| 1 1/4"          | x | 180 mm  | 70.180.07V      | 70.180.07S     | 42,4           | 3,2 | 180  | 20,0 |
| 1 1/4"          | x | 200 mm  | 70.200.07V      | 70.200.07S     | 42,4           | 3,2 | 200  | 20,0 |
| 1 1/4"          | x | 250 mm  | 70.250.07V      | 70.250.07S     | 42,4           | 3,2 | 250  | 20,0 |
| 1 1/4"          | x | 300 mm  | 70.300.07V      | 70.300.07S     | 42,4           | 3,2 | 300  | 20,0 |
| 1 1/4"          | x | 400 mm  | 70.400.07V      | 70.400.07S     | 42,4           | 3,2 | 400  | 20,0 |
| 1 1/4"          | x | 500 mm  | 70.500.07V      | 70.500.07S     | 42,4           | 3,2 | 500  | 20,0 |
| 1 1/4"          | x | 600 mm  | 70.600.07V      | 70.600.07S     | 42,4           | 3,2 | 600  | 20,0 |
| 1 1/4"          | x | 1000 mm | 70.1000.07V     | 70.1000.07S    | 42,4           | 3,2 | 1000 | 20,0 |
| 1 1/4"          | x | 1500 mm | 70.1500.07V     | 70.1500.07S    | 42,4           | 3,2 | 1500 | 20,0 |
| 1 1/4"          | x | 2000 mm | 70.2000.07V     | 70.2000.07S    | 42,4           | 3,2 | 2000 | 20,0 |
|                 |   |         |                 |                |                |     |      |      |
| 1 1/2"          | x | 40 mm   | 70.040.08V      | 70.040.08S     | 48,3           | 3,2 | 40   | 20,0 |
| 1 1/2"          | x | 50 mm   | 70.050.08V      | 70.050.08S     | 48,3           | 3,2 | 50   | 20,0 |
| 1 1/2"          | x | 60 mm   | 70.060.08V      | 70.060.08S     | 48,3           | 3,2 | 60   | 20,0 |
| 1 1/2"          | x | 70 mm   | 70.070.08V      | 70.070.08S     | 48,3           | 3,2 | 70   | 20,0 |
| 1 1/2"          | x | 80 mm   | 70.080.08V      | 70.080.08S     | 48,3           | 3,2 | 80   | 20,0 |
| 1 1/2"          | x | 90 mm   | 70.090.08V      | 70.090.08S     | 48,3           | 3,2 | 90   | 20,0 |
| 1 1/2"          | x | 100 mm  | 70.100.08V      | 70.100.08S     | 48,3           | 3,2 | 100  | 20,0 |
| 1 1/2"          | x | 110 mm  | 70.110.08V      | 70.110.08S     | 48,3           | 3,2 | 110  | 20,0 |
| 1 1/2"          | x | 120 mm  | 70.120.08V      | 70.120.08S     | 48,3           | 3,2 | 120  | 20,0 |
| 1 1/2"          | x | 130 mm  | 70.130.08V      | 70.130.08S     | 48,3           | 3,2 | 130  | 20,0 |
| 1 1/2"          | x | 140 mm  | 70.140.08V      | 70.140.08S     | 48,3           | 3,2 | 140  | 20,0 |
| 1 1/2"          | x | 150 mm  | 70.150.08V      | 70.150.08S     | 48,3           | 3,2 | 150  | 20,0 |
| 1 1/2"          | x | 160 mm  | 70.160.08V      | 70.160.08S     | 48,3           | 3,2 | 160  | 20,0 |
| 1 1/2"          | x | 170 mm  | 70.170.08V      | 70.170.08S     | 48,3           | 3,2 | 170  | 20,0 |
| 1 1/2"          | x | 180 mm  | 70.180.08V      | 70.180.08S     | 48,3           | 3,2 | 180  | 20,0 |
| 1 1/2"          | x | 200 mm  | 70.200.08V      | 70.200.08S     | 48,3           | 3,2 | 200  | 20,0 |
| 1 1/2"          | x | 250 mm  | 70.250.08V      | 70.250.08S     | 48,3           | 3,2 | 250  | 20,0 |
| 1 1/2"          | x | 300 mm  | 70.300.08V      | 70.300.08S     | 48,3           | 3,2 | 300  | 20,0 |
| 1 1/2"          | x | 400 mm  | 70.400.08V      | 70.400.08S     | 48,3           | 3,2 | 400  | 20,0 |
| 1 1/2"          | x | 500 mm  | 70.500.08V      | 70.500.08S     | 48,3           | 3,2 | 500  | 20,0 |
| 1 1/2"          | x | 1000 mm | 70.1000.08V     | 70.1000.08S    | 48,3           | 3,2 | 1000 | 20,0 |
| 1 1/2"          | x | 2000 mm | 70.2000.08V     | 70.2000.08S    | 48,3           | 3,2 | 2000 | 20,0 |
|                 |   |         |                 |                |                |     |      |      |
| 2"              | x | 40 mm   | 70.040.09V      | 70.040.09S     | 60,3           | 3,6 | 40   | 23,0 |
| 2"              | x | 50 mm   | 70.050.09V      | 70.050.09S     | 60,3           | 3,6 | 50   | 23,0 |
| 2"              | x | 60 mm   | 70.060.09V      | 70.060.09S     | 60,3           | 3,6 | 60   | 23,0 |
| 2"              | x | 70 mm   | 70.070.09V      | 70.070.09S     | 60,3           | 3,6 | 70   | 23,0 |
| 2"              | x | 80 mm   | 70.080.09V      | 70.080.09S     | 60,3           | 3,6 | 80   | 23,0 |
| 2"              | x | 100 mm  | 70.100.09V      | 70.100.09S     | 60,3           | 3,6 | 100  | 23,0 |
| 2"              | x | 110 mm  | 70.110.09V      | 70.110.09S     | 60,3           | 3,6 | 110  | 23,0 |
| 2"              | x | 120 mm  | 70.120.09V      | 70.120.09S     | 60,3           | 3,6 | 120  | 23,0 |
| 2"              | x | 140 mm  | 70.140.09V      | 70.140.09S     | 60,3           | 3,6 | 140  | 23,0 |
| 2"              | x | 150 mm  | 70.150.09V      | 70.150.09S     | 60,3           | 3,6 | 150  | 23,0 |
| 2"              | x | 160 mm  | 70.160.09V      | 70.160.09S     | 60,3           | 3,6 | 160  | 23,0 |
| 2"              | x | 180 mm  | 70.180.09V      | 70.180.09S     | 60,3           | 3,6 | 180  | 23,0 |
| 2"              | x | 200 mm  | 70.200.09V      | 70.200.09S     | 60,3           | 3,6 | 200  | 23,0 |
| 2"              | x | 250 mm  | 70.250.09V      | 70.250.09S     | 60,3           | 3,6 | 250  | 23,0 |
| 2"              | x | 300 mm  | 70.300.09V      | 70.300.09S     | 60,3           | 3,6 | 300  | 23,0 |
| 2"              | x | 500 mm  | 70.500.09V      | 70.500.09S     | 60,3           | 3,6 | 500  | 23,0 |
| 2"              | x | 1000 mm | 70.1000.09V     | 70.1000.09S    | 60,3           | 3,6 | 1000 | 23,0 |
| 2"              | x | 2000 mm | 70.2000.09V     | 70.2000.09S    | 60,3           | 3,6 | 2000 | 23,0 |
|                 |   |         |                 |                |                |     |      |      |
| 2 1/2"          | x | 60 mm   | 70.060.10V      | 70.060.10S     | 76,1           | 3,6 | 60   | 27,0 |
| 2 1/2"          | x | 80 mm   | 70.080.10V      | 70.080.10S     | 76,1           | 3,6 | 80   | 27,0 |
| 2 1/2"          | x | 100 mm  | 70.100.10V      | 70.100.10S     | 76,1           | 3,6 | 100  | 27,0 |
| 2 1/2"          | x | 120 mm  | 70.120.10V      | 70.120.10S     | 76,1           | 3,6 | 120  | 27,0 |
| 2 1/2"          | x | 150 mm  | 70.150.10V      | 70.150.10S     | 76,1           | 3,6 | 150  | 27,0 |
| 2 1/2"          | x | 200 mm  | 70.200.10V      | 70.200.10S     | 76,1           | 3,6 | 200  | 27,0 |
| 2 1/2"          | x | 250 mm  | 70.250.10V      | 70.250.10S     | 76,1           | 3,6 | 250  | 27,0 |
| 2 1/2"          | x | 300 mm  | 70.300.10V      | 70.300.10S     | 76,1           | 3,6 | 300  | 27,0 |
| 2 1/2"          | x | 400 mm  | 70.400.10V      | 70.400.10S     | 76,1           | 3,6 | 400  | 27,0 |
| 2 1/2"          | x | 500 mm  | 70.500.10V      | 70.500.10S     | 76,1           | 3,6 | 500  | 27,0 |

| Thread size (R) |   |         | Code galvanized | Code black     | Dimension [mm] |     |      |      |
|-----------------|---|---------|-----------------|----------------|----------------|-----|------|------|
| x (L) length    |   |         | Barrel nipples  | Barrel nipples | D              | T   | L    | L1   |
| 3"              | x | 60 mm   | 70.060.11V      | 70.060.11S     | 88,9           | 4,0 | 60   | 30,0 |
| 3"              | x | 80 mm   | 70.080.11V      | 70.080.11S     | 88,9           | 4,0 | 80   | 30,0 |
| 3"              | x | 100 mm  | 70.100.11V      | 70.100.11S     | 88,9           | 4,0 | 100  | 30,0 |
| 3"              | x | 120 mm  | 70.120.11V      | 70.120.11S     | 88,9           | 4,0 | 120  | 30,0 |
| 3"              | x | 150 mm  | 70.150.11V      | 70.150.11S     | 88,9           | 4,0 | 150  | 30,0 |
| 3"              | x | 180 mm  | 70.180.11V      | 70.180.11S     | 88,9           | 4,0 | 180  | 30,0 |
| 3"              | x | 200 mm  | 70.200.11V      | 70.200.11S     | 88,9           | 4,0 | 200  | 30,0 |
| 3"              | x | 250 mm  | 70.250.11V      | 70.250.11S     | 88,9           | 4,0 | 250  | 30,0 |
| 3"              | x | 300 mm  | 70.300.11V      | 70.300.11S     | 88,9           | 4,0 | 300  | 30,0 |
| 3"              | x | 500 mm  | 70.500.11V      | 70.500.11S     | 88,9           | 4,0 | 500  | 30,0 |
| 4"              | x | 60 mm   | 70.060.12V      | 70.060.12S     | 114,3          | 4,5 | 60   | 36,0 |
| 4"              | x | 80 mm   | 70.080.12V      | 70.080.12S     | 114,3          | 4,5 | 80   | 36,0 |
| 4"              | x | 100 mm  | 70.100.12V      | 70.100.12S     | 114,3          | 4,5 | 100  | 36,0 |
| 4"              | x | 120 mm  | 70.120.12V      | 70.120.12S     | 114,3          | 4,5 | 120  | 36,0 |
| 4"              | x | 150 mm  | 70.150.12V      | 70.150.12S     | 114,3          | 4,5 | 150  | 36,0 |
| 4"              | x | 180 mm  | 70.180.12V      | 70.180.12S     | 114,3          | 4,5 | 180  | 36,0 |
| 4"              | x | 200 mm  | 70.200.12V      | 70.200.12S     | 114,3          | 4,5 | 200  | 36,0 |
| 4"              | x | 250 mm  | 70.250.12V      | 70.250.12S     | 114,3          | 4,5 | 250  | 36,0 |
| 4"              | x | 300 mm  | 70.300.12V      | 70.300.12S     | 114,3          | 4,5 | 300  | 36,0 |
| 4"              | x | 500 mm  | 70.500.12V      | 70.500.12S     | 114,3          | 4,5 | 500  | 36,0 |
| 4"              | x | 1000 mm | 70.1000.12V     | 70.1000.12S    | 114,3          | 4,5 | 1000 | 36,0 |

# BARREL NIPPLE, LONG THREAD, GALVANIZED OR BLACK



**PARAMETERS:** following to DIN EN 10241

**MATERIAL:** steel pipe according to DIN EN 10255


**THREADS:** accordingly to ISO 7/1

**SIZES:** from 3/8" to 2"

| Thread size (R) |   |        | Code galvanized | Code black     | Dimension [mm] |     |     |    |    |  |
|-----------------|---|--------|-----------------|----------------|----------------|-----|-----|----|----|--|
| x (L) length    |   |        | Barrel nipples  | Barrel nipples | D              | T   | L   | L1 | L2 |  |
| 3/8"            | x | 100 mm | 71.100.03V      | 71.100.03S     | 17,2           | 2,3 | 100 | 12 | 50 |  |
| 3/8"            | x | 150 mm | 71.150.03V      | 71.150.03S     | 17,2           | 2,3 | 150 | 12 | 60 |  |
| 3/8"            | x | 200 mm | 71.200.03V      | 71.200.03S     | 17,2           | 2,3 | 200 | 12 | 60 |  |
| 3/8"            | x | 300 mm | 71.300.03V      | 71.300.03S     | 17,2           | 2,3 | 300 | 12 | 60 |  |
| 1/2"            | x | 100 mm | 71.100.04V      | 71.100.04S     | 21,3           | 2,6 | 100 | 15 | 50 |  |
| 1/2"            | x | 150 mm | 71.150.04V      | 71.150.04S     | 21,3           | 2,6 | 150 | 15 | 60 |  |
| 1/2"            | x | 200 mm | 71.200.04V      | 71.200.04S     | 21,3           | 2,6 | 200 | 15 | 60 |  |
| 1/2"            | x | 300 mm | 71.300.04V      | 71.300.04S     | 21,3           | 2,6 | 300 | 15 | 60 |  |
| 3/4"            | x | 100 mm | 71.100.05V      | 71.100.05S     | 26,9           | 2,6 | 100 | 15 | 50 |  |
| 3/4"            | x | 120 mm | 71.120.05V      | 71.120.05S     | 26,9           | 2,6 | 120 | 15 | 50 |  |
| 3/4"            | x | 150 mm | 71.150.05V      | 71.150.05S     | 26,9           | 2,6 | 150 | 15 | 60 |  |
| 3/4"            | x | 200 mm | 71.200.05V      | 71.200.05S     | 26,9           | 2,6 | 200 | 15 | 60 |  |
| 3/4"            | x | 300 mm | 71.300.05V      | 71.300.05S     | 26,9           | 2,6 | 300 | 15 | 60 |  |

| Thread size (R) |   |        | Code galvanized | Code black     | Dimension [mm] |     |     |    |    |
|-----------------|---|--------|-----------------|----------------|----------------|-----|-----|----|----|
| x (L) length    |   |        | Barrel nipples  | Barrel nipples | D              | T   | L   | L1 | L2 |
| 1"              | x | 100 mm | 71.100.06V      | 71.100.06S     | 33.7           | 3.2 | 100 | 17 | 50 |
| 1"              | x | 140 mm | 71.140.06V      | 71.140.06S     | 33.7           | 3.2 | 140 | 17 | 50 |
| 1"              | x | 150 mm | 71.150.06V      | 71.150.06S     | 33.7           | 3.2 | 150 | 17 | 70 |
| 1"              | x | 200 mm | 71.200.06V      | 71.200.06S     | 33.7           | 3.2 | 200 | 17 | 70 |
| 1"              | x | 300 mm | 71.300.06V      | 71.300.06S     | 33.7           | 3.2 | 300 | 17 | 70 |
| 1 1/4"          | x | 100 mm | 71.100.07V      | 71.100.07S     | 42.4           | 3.2 | 100 | 20 | 50 |
| 1 1/4"          | x | 150 mm | 71.150.07V      | 71.150.07S     | 42.4           | 3.2 | 150 | 20 | 70 |
| 1 1/4"          | x | 200 mm | 71.200.07V      | 71.200.07S     | 42.4           | 3.2 | 200 | 20 | 70 |
| 1 1/4"          | x | 300 mm | 71.300.07V      | 71.300.07S     | 42.4           | 3.2 | 300 | 20 | 70 |
| 1 1/2"          | x | 100 mm | 71.100.08V      | 71.100.08S     | 48.3           | 3.2 | 100 | 20 | 50 |
| 1 1/2"          | x | 150 mm | 71.150.08V      | 71.150.08S     | 48.3           | 3.2 | 150 | 20 | 70 |
| 1 1/2"          | x | 180 mm | 71.180.08V      | 71.180.08S     | 48.3           | 3.2 | 180 | 20 | 70 |
| 1 1/2"          | x | 200 mm | 71.200.08V      | 71.200.08S     | 48.3           | 3.2 | 200 | 20 | 70 |
| 1 1/2"          | x | 300 mm | 71.300.08V      | 71.300.08S     | 48.3           | 3.2 | 300 | 20 | 70 |
| 2"              | x | 100 mm | 71.100.09V      | 71.100.09S     | 60.3           | 3.6 | 100 | 23 | 50 |
| 2"              | x | 150 mm | 71.150.09V      | 71.150.09S     | 60.3           | 3.6 | 150 | 23 | 80 |
| 2"              | x | 170 mm | 71.170.09V      | 71.170.09S     | 60.3           | 3.6 | 170 | 23 | 80 |
| 2"              | x | 200 mm | 71.200.09V      | 71.200.09S     | 60.3           | 3.6 | 200 | 23 | 80 |
| 2"              | x | 300 mm | 71.300.09V      | 71.300.09S     | 60.3           | 3.6 | 300 | 23 | 80 |

NIPPLE, ONE END THREAD, GALVANIZED OR BLACK



**PARAMETERS:** following to DIN EN 10241

**MATERIAL:** steel pipe according to DIN EN 10255

**THREADS:** accordingly to ISO 7/1

**SIZES:** from 3/8" to 2"



| Thread size (R) |   |        | Code galvanized | Code black     | Dimension [mm] |     |     |    |
|-----------------|---|--------|-----------------|----------------|----------------|-----|-----|----|
| x (L) length    |   |        | Barrel nipples  | Barrel nipples | D              | T   | L   | L1 |
| 3/8"            | x | 60 mm  | 72.060.03V      | 72.060.03S     | 17.2           | 2.3 | 60  | 12 |
| 3/8"            | x | 100 mm | 72.100.03V      | 72.100.03S     | 17.2           | 2.3 | 100 | 12 |
| 3/8"            | x | 150 mm | 72.150.03V      | 72.150.03S     | 17.2           | 2.3 | 150 | 12 |
| 3/8"            | x | 200 mm | 72.200.03V      | 72.200.03S     | 17.2           | 2.3 | 200 | 12 |
| 1/2"            | x | 60 mm  | 72.060.04V      | 72.060.04S     | 21.3           | 2.6 | 60  | 15 |
| 1/2"            | x | 100 mm | 72.100.04V      | 72.100.04S     | 21.3           | 2.6 | 100 | 15 |
| 1/2"            | x | 150 mm | 72.150.04V      | 72.150.04S     | 21.3           | 2.6 | 150 | 15 |
| 1/2"            | x | 200 mm | 72.200.04V      | 72.200.04S     | 21.3           | 2.6 | 200 | 15 |
| 1/2"            | x | 300 mm | 72.300.04V      | 72.300.04S     | 21.3           | 2.6 | 300 | 15 |
| 3/4"            | x | 100 mm | 72.100.05V      | 72.100.05S     | 26.9           | 2.6 | 100 | 15 |
| 3/4"            | x | 150 mm | 72.150.05V      | 72.150.05S     | 26.9           | 2.6 | 150 | 15 |
| 3/4"            | x | 200 mm | 72.200.05V      | 72.200.05S     | 26.9           | 2.6 | 200 | 15 |
| 3/4"            | x | 300 mm | 72.300.05V      | 72.300.05S     | 26.9           | 2.6 | 300 | 15 |

| Thread size (R) |   |        | Code galvanized   | Code black        | Dimension [mm] |     |     |    |
|-----------------|---|--------|-------------------|-------------------|----------------|-----|-----|----|
| x (L) length    |   |        | Barrel nipples    | Barrel nipples    | D              | T   | L   | L1 |
| 1"              | x | 100 mm | <b>72.100.06V</b> | <b>72.100.06S</b> | 33.7           | 3.2 | 100 | 17 |
| 1"              | x | 150 mm | <b>72.150.06V</b> | <b>72.150.06S</b> | 33.7           | 3.2 | 150 | 17 |
| 1"              | x | 200 mm | <b>72.200.06V</b> | <b>72.200.06S</b> | 33.7           | 3.2 | 200 | 17 |
| 1"              | x | 300 mm | <b>72.300.06V</b> | <b>72.300.06S</b> | 33.7           | 3.2 | 300 | 17 |
| 1 1/4"          | x | 100 mm | <b>72.100.07V</b> | <b>72.100.07S</b> | 42.4           | 3.2 | 100 | 20 |
| 1 1/4"          | x | 150 mm | <b>72.150.07V</b> | <b>72.150.07S</b> | 42.4           | 3.2 | 150 | 20 |
| 1 1/4"          | x | 200 mm | <b>72.200.07V</b> | <b>72.200.07S</b> | 42.4           | 3.2 | 200 | 20 |
| 1 1/4"          | x | 250 mm | <b>72.250.07V</b> | <b>72.250.07S</b> | 42.4           | 3.2 | 250 | 20 |
| 1 1/4"          | x | 300 mm | <b>72.300.07V</b> | <b>72.300.07S</b> | 42.4           | 3.2 | 300 | 20 |
| 1 1/2"          | x | 100 mm | <b>72.100.08V</b> | <b>72.100.08S</b> | 48.3           | 3.2 | 100 | 20 |
| 1 1/2"          | x | 150 mm | <b>72.150.08V</b> | <b>72.150.08S</b> | 48.3           | 3.2 | 150 | 20 |
| 1 1/2"          | x | 200 mm | <b>72.200.08V</b> | <b>72.200.08S</b> | 48.3           | 3.2 | 200 | 20 |
| 1 1/2"          | x | 250 mm | <b>72.250.08V</b> | <b>72.250.08S</b> | 48.3           | 3.2 | 250 | 20 |
| 1 1/2"          | x | 300 mm | <b>72.300.08V</b> | <b>72.300.08S</b> | 48.3           | 3.2 | 300 | 20 |
| 2"              | x | 100 mm | <b>72.100.09V</b> | <b>72.100.09S</b> | 60.3           | 3.6 | 100 | 23 |
| 2"              | x | 150 mm | <b>72.150.09V</b> | <b>72.150.09S</b> | 60.3           | 3.6 | 150 | 23 |
| 2"              | x | 200 mm | <b>72.200.09V</b> | <b>72.200.09S</b> | 60.3           | 3.6 | 200 | 23 |
| 2"              | x | 250 mm | <b>72.250.09V</b> | <b>72.250.09S</b> | 60.3           | 3.6 | 250 | 23 |
| 2"              | x | 300 mm | <b>72.300.09V</b> | <b>72.300.09S</b> | 60.3           | 3.6 | 300 | 23 |

## SOCKETS, BLACK

**FEATURES:** Following to DIN EN 10241**COMPOSITION:** Steel pipe in compliance with DIN10255**THREADS:** Accordingly to ISO 7/1


| Size         | Code calvanized | Dimensions [mm] |      |
|--------------|-----------------|-----------------|------|
|              |                 | D               | L    |
| Total length |                 |                 |      |
| 1/8"         | 73.001.01S      | 14,0            | 17,0 |
| 1/4"         | 73.001.02S      | 17,0            | 25,0 |
| 3/8"         | 73.001.03S      | 21,3            | 26,0 |
| 1/2"         | 73.001.04S      | 26,4            | 34,0 |
| 3/4"         | 73.001.05S      | 31,8            | 36,0 |
| 1"           | 73.001.06S      | 39,5            | 43,0 |
| 1 1/4"       | 73.001.07S      | 48,3            | 48,0 |
| 1 1/2"       | 73.001.08S      | 54,5            | 48,0 |
| 2"           | 73.001.09S      | 66,3            | 56,0 |
| 2 1/2"       | 73.001.10S      | 82,0            | 66,0 |
| 3"           | 73.001.11S      | 95,0            | 71,0 |
| 4"           | 73.001.12S      | 122,0           | 83,0 |

**Half length**

|        |            |      |      |
|--------|------------|------|------|
| 1/4"   | 73.002.02S | 17,0 | 11,0 |
| 3/8"   | 73.002.03S | 21,3 | 11,5 |
| 1/2"   | 73.002.04S | 26,4 | 15,0 |
| 3/4"   | 73.002.05S | 31,8 | 19,0 |
| 1"     | 73.002.06S | 39,5 | 22,0 |
| 1 1/4" | 73.002.07S | 48,3 | 22,0 |
| 1 1/2" | 73.002.08S | 54,5 | 26,0 |
| 2"     | 73.002.09S | 66,3 | 30,0 |

**Special length**

|            |                |      |       |
|------------|----------------|------|-------|
| 3/8" x 60  | 73.003.03.60S  | 21,3 | 60,0  |
| 1/2" x 60  | 73.003.04.60S  | 26,4 | 60,0  |
| 1/2" x 80  | 73.003.04.80S  | 26,4 | 80,0  |
| 1/2" x 100 | 73.003.04.100S | 26,4 | 100,0 |

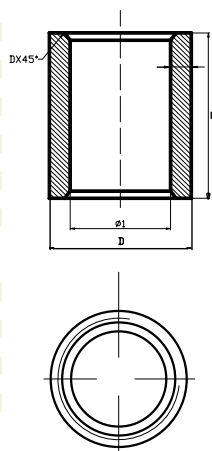

**CERTIFICATES**

**PLEASE ASK AT OUR SALES OFFICES  
FOR NATIONAL CERTIFICATES.**